

## Threaded plugs

Resistant up to 200 °C, Aluminium

### SPECIFICATION

#### Identification no.

- No. **1**: without vent hole
- No. **2**: with vent hole

Aluminium

plastic coated  
black, RAL 9005, matte finish **SW**

blank **BL**  
tumbled

temperature resistant up to **200 °C**

Sealing ring rubber FPM (Viton®)

Identification by not black finish of the seal



### INFORMATION

Threaded plugs GN 442 with the external diameter  $d_1$  match the screw-in holes for DIN 3852 pipe bolt connections.


The sealing ring is embedded in a radial recess on the plane side, which makes the sealing ring captive and cannot be squeezed out during tightening. The sealing is also relatively soft, enhancing the sealing effect also on uneven surfaces.

### ON REQUEST

- Threaded plugs with dipstick

### TECHNICAL INFORMATION

- Elastomer characteristics (see page A32)

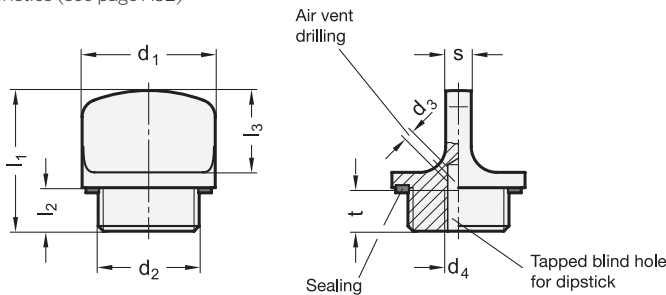

\* Complete with colour index of the Threaded plugs

**SW** RAL9005  
**BL** blank

### GN 442

| Description           | d1 | d2         | d3 | d4  | l1 ±0.5 | l2  | l3 | s | t min. | Δ  |
|-----------------------|----|------------|----|-----|---------|-----|----|---|--------|----|
| GN 442-22-M16x1,5-1-* | 22 | M 16 x 1,5 | -  | M 5 | 26      | 8   | 15 | 5 | 8      | 12 |
| GN 442-22-M16x1,5-2-* | 22 | M 16 x 1,5 | 2  | M 5 | 26      | 8   | 15 | 5 | 8      | 12 |
| GN 442-26-M20x1,5-1-* | 26 | M 20 x 1,5 | -  | M 5 | 27,5    | 8,5 | 16 | 5 | 8      | 17 |
| GN 442-26-M20x1,5-2-* | 26 | M 20 x 1,5 | 2  | M 5 | 27,5    | 8,5 | 16 | 5 | 8      | 17 |
| GN 442-32-M26x1,5-1-* | 32 | M 26 x 1,5 | -  | M 5 | 29      | 9   | 17 | 6 | 8      | 27 |
| GN 442-32-M26x1,5-2-* | 32 | M 26 x 1,5 | 2  | M 5 | 29      | 9   | 17 | 6 | 8      | 27 |
| GN 442-22-G3/8-1-*    | 22 | G 3/8      | -  | M 5 | 26      | 8   | 15 | 5 | 8      | 12 |
| GN 442-22-G3/8-2-*    | 22 | G 3/8      | 2  | M 5 | 26      | 8   | 15 | 5 | 8      | 12 |
| GN 442-26-G1/2-1-*    | 26 | G 1/2      | -  | M 5 | 27,5    | 8,5 | 16 | 5 | 8      | 17 |
| GN 442-26-G1/2-2-*    | 26 | G 1/2      | 2  | M 5 | 27,5    | 8,5 | 16 | 5 | 8      | 17 |
| GN 442-32-G3/4-1-*    | 32 | G 3/4      | -  | M 5 | 29      | 9   | 17 | 6 | 8      | 27 |
| GN 442-32-G3/4-2-*    | 32 | G 3/4      | 2  | M 5 | 29      | 9   | 17 | 6 | 8      | 27 |
| GN 442-40-G1-1-*      | 40 | G 1        | -  | M 5 | 32,5    | 11  | 18 | 7 | 8      | 48 |
| GN 442-40-G1-2-*      | 40 | G 1        | 2  | M 5 | 32,5    | 11  | 18 | 7 | 8      | 48 |

Weight colour SW

