

## Ball Levers

Steel, Blackened

### SPECIFICATION

#### Types

- Type **L**: Angled lever with plain bore H7
- Type **N**: Angled lever with threaded bore

Steel

- turned
- blackened

Ball knobs DIN 319 (see page 538)



Plastic, black

### INFORMATION

The official DIN standard sheet specifies additional sizes 200 - M24 / B24.

### TECHNICAL INFORMATION

- ISO Fundamental Tolerances (see page A21)

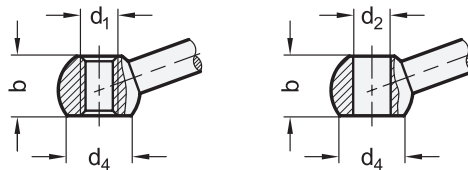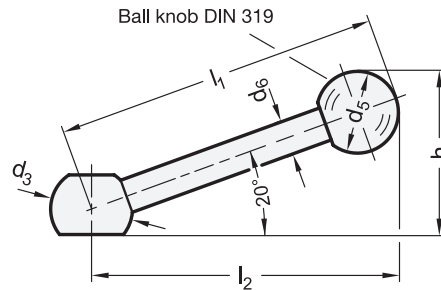

### DIN 6337

| Description        | l1  | d1   | d2 H7 | b    | d3 | d4   | d5 | d6 | h ≈ | l2 ≈ | ⚖   |
|--------------------|-----|------|-------|------|----|------|----|----|-----|------|-----|
| DIN 6337-63-B8-L   | 63  | -    | B 8   | 12   | 16 | 12.5 | 20 | 8  | 33  | 60   | 32  |
| DIN 6337-80-B10-L  | 80  | -    | B 10  | 14.5 | 20 | 16   | 20 | 9  | 40  | 76   | 53  |
| DIN 6337-100-B12-L | 100 | -    | B 12  | 18.5 | 25 | 20   | 25 | 11 | 50  | 95   | 100 |
| DIN 6337-125-B16-L | 125 | -    | B 16  | 24   | 32 | 25   | 32 | 15 | 63  | 119  | 216 |
| DIN 6337-160-B20-L | 160 | -    | B 20  | 30   | 40 | 31   | 40 | 18 | 80  | 152  | 415 |
| DIN 6337-63-M8-N   | 63  | M 8  | -     | 12   | 16 | 12.5 | 20 | 8  | 33  | 60   | 32  |
| DIN 6337-80-M10-N  | 80  | M 10 | -     | 14.5 | 20 | 16   | 20 | 9  | 40  | 76   | 54  |
| DIN 6337-100-M12-N | 100 | M 12 | -     | 18.5 | 25 | 20   | 25 | 11 | 50  | 95   | 102 |
| DIN 6337-125-M16-N | 125 | M 16 | -     | 24   | 32 | 25   | 32 | 15 | 63  | 119  | 223 |
| DIN 6337-160-M20-N | 160 | M 20 | -     | 30   | 40 | 31   | 40 | 18 | 80  | 152  | 425 |