

## UC-RF antenna extensions

with SMA-RP connector

### CABLE

Shielded cable with PVC sheath, bend radius in fixed position  $\geq 50$  mm.

### CONNECTORS

Male and female SMA-RP connectors.

### APPLICATIONS


If the extension is used as a spare part in an existing equipment, please contact the Eles+Ganter technical service to check its compatibility.

### SPECIAL EXECUTIONS ON REQUEST

Extensions with cables in different lengths.



Mechanical and electrical characteristics	
Impedance	50 Ohm
Working temperature	-40 °C ÷ 70 °C

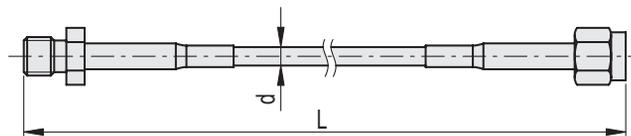

Code	Description	L $\pm$ 50	d $\pm$ 0.5	
CE.99263	FC-UC-1.0-R	1000	3	48
CE.99265	FC-UC-2.5-R	2500	5	106
CE.99267	FC-UC-5.0-R	5000	5	208
CE.99269	FC-UC-10.0-R	10000	5	206