

T-Angle Linear Actuator Connectors

Stainless Steel

SPECIFICATION

Types

- Type **A**: Without seals
- Type **B**: With seals

Identification no.

- No. **4**: With 2 stainless steel cap nuts DIN 917

Stainless steel AISI CF-8

Matte shot-blasted

Sleeve bearing

Plastic (PTFE)

Carriage bolt DIN 603

Stainless steel

Cap nuts DIN 917 / Washers

Stainless steel

Seals

- Sealing disks
Plastic (Polyacetal POM)

- Spacer ring
Silicon, 40 ... 60 Shore A



INFORMATION

T-angle linear actuator connectors GN 192.15 are based on T-angle connector clamps. The additionally provided mounting holes are used to connect to the drive key of a linear actuator. Bore with the designation **G** are equipped with sleeve bearings.

With the screw locations **z₂**, the play of the guide bore **d₁** can be adjusted or the linear actuator connectors can be clamped after adjustment. Type B is equipped with seals at the screw locations.


For quick clamping without tools, the cap nuts can be replaced by the adjustable hand levers GN 911.3 (see page 1875) listed in the table as accessories.

ACCESSORY

- Adjustable Hand Levers GN 911.3 (see page 1875)

TECHNICAL INFORMATION

- Plastic Characteristics (see page A2)
- Stainless Steel Characteristics (see page A26)

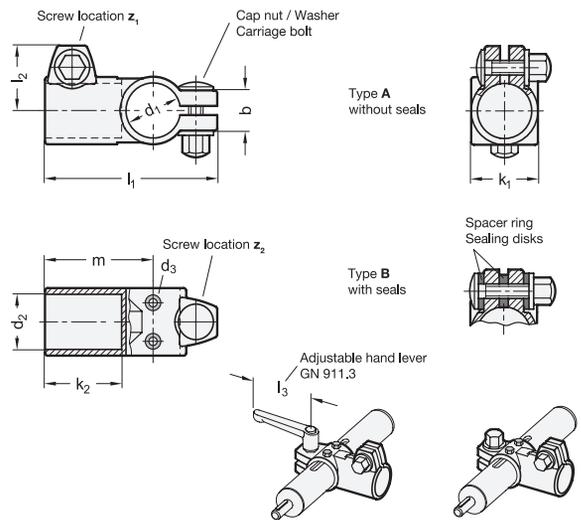

GN 192.15-A

STAINLESS STEEL

Description	d1 Bore with sleeve bearing	d2 Bore	b	d3 Mounting screws on the drive key	k1 Clamping length	k2 Clamping length	l1	l2	m	z1 Screw location	z2 Screw location	Accessory Recom. hand lever GN 911.3 for z1 l3	Accessory Recom. hand lever GN 911.3 for z2 l3	⚖
GN 192.15-G30-B30-A-4	G 30	B 30	22	M 4	37	42	96	35	60	M 8	M 8	63 78	63 78	320
GN 192.15-G50-B50-A-4	G 50	B 50	30	M 6	65	75	151.5	48.5	103	M 10	M 10	78 92	78 92	1023

GN 192.15-B

STAINLESS STEEL

Description	d1 Bore with sleeve bearing	d2 Bore	b	d3 Mounting screws on the drive key	k1 Clamping length	k2 Clamping length	l1	l2	m	z1 Screw location	z2 Screw location	Accessory Recom. hand lever GN 911.3 for z1 l3	Accessory Recom. hand lever GN 911.3 for z2 l3	⚖
GN 192.15-G30-B30-B-4	G 30	B 30	22	M 4	37	42	96	35	60	M 8	M 8	63 78	63 78	320
GN 192.15-G50-B50-B-4	G 50	B 50	30	M 6	65	75	151.5	48.5	103	M 10	M 10	78 92	78 92	1023