

Handwheels

Pressed Steel, for Valves

SPECIFICATION

Pressed steel

Cathodic dip coated (KTL)

- Black, RAL 9005 **SWK**
- Red, RAL 3000 **RTK**
- Hub
- Steel, welded


INFORMATION

Handwheels GN 227.7 feature high mechanical strength and a coating for increased corrosion resistance. They are also not affected by shock and knocks.

The conical square hole allows easy installation and firm seating on a spindle. The cast shape prevents injuries from sharp edges during handling. The engraved labels "SHUT" and "OPEN" help with safe and correct operation of the valves.

ACCESSORY

- GN 184 Countersunk Washers (see page 971)

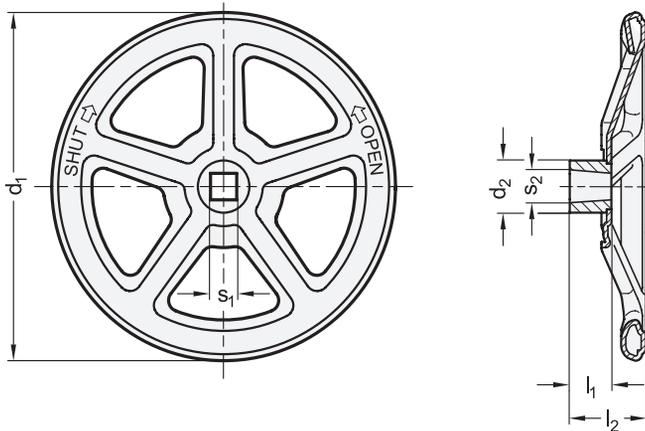

GN 227.7

Description	d ₁	s ₁	s ₂	d ₂	l ₁	l ₂ ±1	No. of spokes	Thickness of pressed steel	⚖
GN 227.7-125-VK11-RTK	125	VK 11	12.7	28	17	31	3	1.2	240
GN 227.7-125-VK11-SWK	125	VK 11	12.7	28	17	31	3	1.2	240
GN 227.7-150-VK12-RTK	150	VK 12	13.8	30	18	33.5	3	1.5	360
GN 227.7-150-VK12-SWK	150	VK 12	13.8	30	18	33.5	3	1.5	360
GN 227.7-200-VK14-RTK	200	VK 14	16	35	20	40.5	3	2	750
GN 227.7-200-VK14-SWK	200	VK 14	16	35	20	40.5	3	2	750
GN 227.7-250-VK17-RTK	250	VK 17	19.25	36	23	47	4	2	1100
GN 227.7-250-VK17-SWK	250	VK 17	19.25	36	23	47	4	2	1100
GN 227.7-300-VK19-RTK	300	VK 19	21.8	42	28	59	5	2	1600
GN 227.7-300-VK19-SWK	300	VK 19	21.8	42	28	59	5	2	1600
GN 227.7-400-VK24-RTK	400	VK 24	27	48	30	66	5	2.5	3100
GN 227.7-400-VK24-SWK	400	VK 24	27	48	30	66	5	2.5	3100

