

Rubber bumper stops

for hinges GN 237, CFM, GN 337 and CFMY.

SPECIFICATION

Steel precision casting **ST**
zinc plated, plastic coated
black, RAL 9005, textured finish **SW**

Elastomer element

- NBR (Perbunan®)
- temperature resistant up to 120 °C
- Hardness 85±5 Shore A





INFORMATION

In terms of their dimensions, limit stops GN 2374 have been designed as extras for the GN 237 (see page 1386) and GN 337 (see page 1423) family of hinges. They can also be bolt-attached when mounting the hinge, with an elastomer element limiting the angle of rotation to the value w .


They are mainly used for lighter traps and gates, or when the limit stop is not expected to be exposed to dynamic loads.

TECHNICAL INFORMATION

- Elastomer characteristics (see page A32)

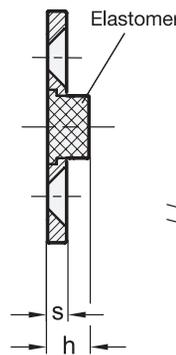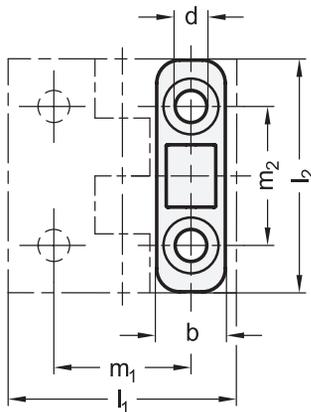

Application example



GN 2374

Description	l2	w	b	d	h	l1	m1	m2	s	⚖️
GN 2374-ST-40-150-SW	40	150	12	5.3	7.8	40	25	25	3.5	10
GN 2374-ST-50-150-SW	50	150	15	6.3	9.2	50	30	30	4	12
GN 2374-ST-60-150-SW	60	150	18	8.3	10.9	60	36	36	5	21