

Cranked Handles

Stainless Steel

SPECIFICATION

Body

Stainless steel precision casting AISI CF-8
Contact face of hub machined

Revolving handle

Plastic, phenolic resin (PF)
• Black, shiny finish
• Spindle
Stainless steel AISI 304

INFORMATION


Cranked handles GN 269 have been designed to comply with stringent hygiene requirements.
The cylindrical handles are made of phenolic resin material which in general provides good stability when exposed to chemicals.

ON REQUEST

• With retractable handle GN 798.5 (see page 586)

TECHNICAL INFORMATION

- Cross Holes GN 110 (see page A17)
- Squares DIN 79 (see page A16)
- ISO-Fundamental Tolerances (see page A21)
- Plastic Characteristics (see page A2)
- Stainless Steel Characteristics (see page A26)

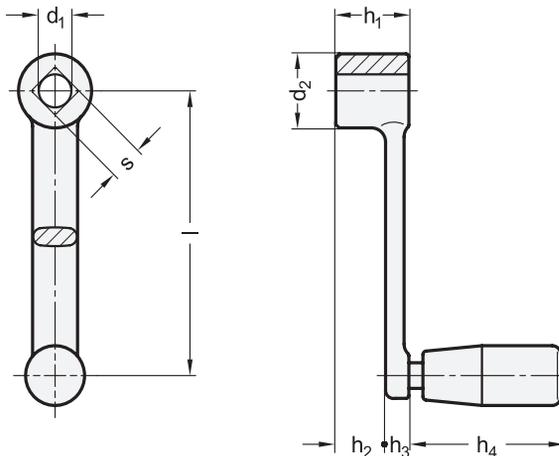

GN 269-B

STAINLESS STEEL

Description	Length l	d1 H9 Bore	d2	h1	h2 ≈	h3	h4 ≈	Ø Handle	⚖
GN 269-80-B10	80	B 10	22	22	15.4	6.6	45	18	130
GN 269-100-B12	100	B 12	26	26	17.7	8.3	55	21	200
GN 269-125-B14	125	B 14	28	28	18.8	9.2	71	23	300
GN 269-160-B17	160	B 17	32	32	22.6	9.4	71	23	396
GN 269-200-B19	200	B 19	38	38	28	9.4	71	23	546

GN 269-S

STAINLESS STEEL

Description	Length l	s H11 Square	d2	h1	h2 ≈	h3	h4 ≈	Ø Handle	⚖
GN 269-80-V10	80	V 10	22	22	15.4	6.6	45	18	124
GN 269-100-V12	100	V 12	26	26	17.7	8.3	55	21	187
GN 269-125-V14	125	V 14	28	28	18.8	9.2	71	23	300
GN 269-160-V17	160	V 17	32	32	22.6	9.4	71	23	372
GN 269-200-V19	200	V 19	38	38	28	9.4	71	23	540