

Adjustable Hand Levers

**Stainless Steel, Matte Shot-Blasted,
with Internal Thread / Fitting Bore,
with Threaded Stud**

SPECIFICATION

Types

- Type **AS**: With external hex
- Type **IS**: With internal hexalobular

Handle

Stainless steel precision casting AISI CF-8
Matte shot-blasted

Insert / Retaining screw

Stainless steel AISI 303

Pressure spring

Stainless steel AISI 301

INFORMATION

Adjustable hand levers GN 300.5 are ideal whenever parts have to be clamped in a confined space or in a particular lever position. The screw insert is connected to the handle via serrations and can easily be disengaged.


When the handle is lifted (pulled), the serration is released, and the hand lever can be relocated into any required position. On releasing the handle, it will automatically engage again.

The geometry of type AS is designed to prevent the accumulation of dirt and simplify cleaning.



TECHNICAL INFORMATION

- ISO-Fundamental Tolerances (see page A21)
- Stainless Steel Characteristics (see page A26)

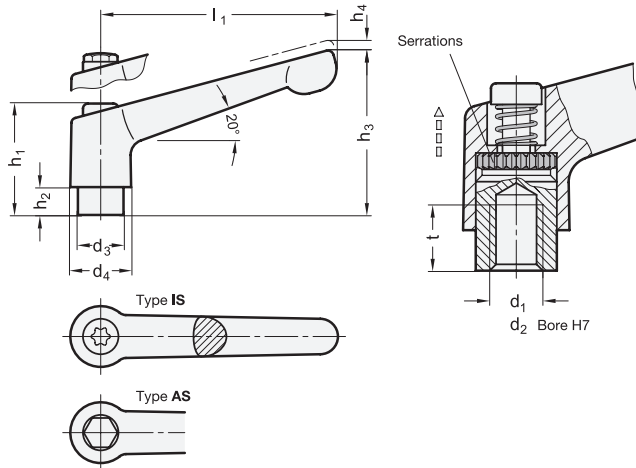

* Complete with

AS
With external hex

IS
With internal hexalobular

GN 300.5-With Internal Thread / Fitting Bore **STAINLESS STEEL**


Description	l1	d1	d2 H7	d3	d4	h1	h2	h3	h4 Stroke	t min.	⚖
GN 300.5-30-M3-*	30	M 3	-	10	13	24.5	4	31	3.5	8	30
GN 300.5-30-M4-*	30	M 4	-	10	13	24.5	4	31	3.5	8	30
GN 300.5-30-M5-*	30	M 5	-	10	13	24.5	4	31	3.5	8	28
GN 300.5-30-M6-*	30	M 6	-	10	13	24.5	4	31	3.5	8	29
GN 300.5-30-B5-*	30	-	B 5	10	13	24.5	4	31	3.5	8	24
GN 300.5-30-B6-*	30	-	B 6	10	13	24.5	4	31	3.5	8	24
GN 300.5-45-M4-*	45	M 4	-	10	13	24.5	4	34	3.5	8	41
GN 300.5-45-M5-*	45	M 5	-	10	13	24.5	4	34	3.5	8	39
GN 300.5-45-M6-*	45	M 6	-	10	13	24.5	4	34	3.5	8	40
GN 300.5-45-B5-*	45	-	B 5	10	13	24.5	4	34	3.5	8	35
GN 300.5-45-B6-*	45	-	B 6	10	17.5	24.5	4	34	3.5	8	35
GN 300.5-63-M6-*	63	M 6	-	13.5	17.5	31	6.5	45	4	11	91
GN 300.5-63-M8-*	63	M 8	-	13.5	17.5	31	6.5	45	4	11	76

GN 300.5-With Internal Thread / Fitting Bore **STAINLESS STEEL**

Description	l1	d1	d2 H7	d3	d4	h1	h2	h3	h4 Stroke	t min.	⚖
GN 300.5-63-B8-*	63	-	B 8	13.5	21	31	6.5	45	4	11	88
GN 300.5-78-B8-*	78	-	B 8	16	21	36	8	54	4	14	144
GN 300.5-78-B10-*	78	-	B 10	16	21	36	8	54	4	14	146
GN 300.5-78-M8-*	78	M 8	-	16	21	36	8	54	4	14	146
GN 300.5-78-M10-*	78	M 10	-	16	21	36	8	54	4	14	146
GN 300.5-78-M12-*	78	M 12	-	16	24	36	8	54	4	14	146
GN 300.5-92-M10-*	92	M 10	-	19	24	43	11	64	4	17	229
GN 300.5-92-M12-*	92	M 12	-	19	24	43	11	64	4	17	223
GN 300.5-92-B12-*	92	-	B 12	19	-	43	11	64	4	17	225

* Weight Type AS

* Complete with
AS
With external hex
IS
With internal hexalobular

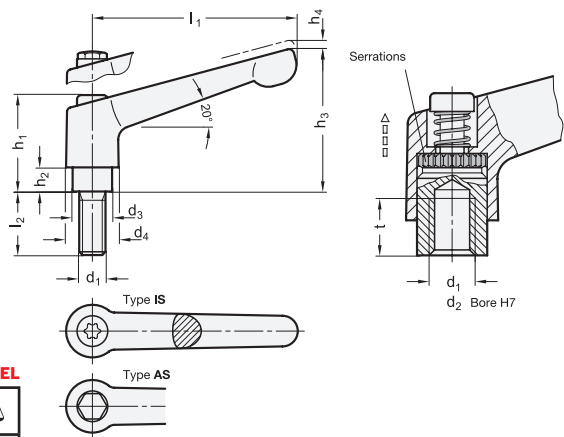

GN 300.5-With Threaded Stud

STAINLESS STEEL

Description	l1	d1	l2	d3	d4	h1	h2	h3	h4 Stroke	Weight
GN 300.5-30-M3-6-*	30	M 3	6	10	13	24.5	4	31	3.5	31
GN 300.5-30-M3-8-*	30	M 3	8	10	13	24.5	4	31	3.5	31
GN 300.5-30-M3-10-*	30	M 3	10	10	13	24.5	4	31	3.5	32
GN 300.5-30-M3-12-*	30	M 3	12	10	13	24.5	4	31	3.5	32
GN 300.5-30-M3-16-*	30	M 3	16	10	13	24.5	4	31	3.5	33
GN 300.5-30-M4-12-*	30	M 4	12	10	13	24.5	4	31	3.5	31
GN 300.5-30-M4-16-*	30	M 4	16	10	13	24.5	4	31	3.5	31
GN 300.5-30-M4-20-*	30	M 4	20	10	13	24.5	4	31	3.5	32
GN 300.5-30-M4-25-*	30	M 4	25	10	13	24.5	4	31	3.5	32
GN 300.5-30-M4-32-*	30	M 4	32	10	13	24.5	4	31	3.5	32
GN 300.5-30-M5-12-*	30	M 5	12	10	13	24.5	4	31	3.5	31
GN 300.5-30-M6-12-*	30	M 6	12	10	13	24.5	4	31	3.5	32
GN 300.5-30-M5-16-*	30	M 5	16	10	13	24.5	4	31	3.5	32
GN 300.5-30-M6-16-*	30	M 6	16	10	13	24.5	4	31	3.5	33
GN 300.5-30-M5-20-*	30	M 5	20	10	13	24.5	4	31	3.5	32
GN 300.5-30-M6-20-*	30	M 6	20	10	13	24.5	4	31	3.5	33
GN 300.5-30-M5-25-*	30	M 5	25	10	13	24.5	4	31	3.5	33
GN 300.5-30-M6-25-*	30	M 6	25	10	13	24.5	4	31	3.5	34
GN 300.5-30-M5-32-*	30	M 5	32	10	13	24.5	4	31	3.5	34
GN 300.5-30-M6-32-*	30	M 6	32	10	13	24.5	4	31	3.5	36
GN 300.5-30-M5-40-*	30	M 5	40	10	13	24.5	4	31	3.5	35
GN 300.5-30-M6-40-*	30	M 6	40	10	13	24.5	4	31	3.5	37
GN 300.5-30-M5-50-*	30	M 5	50	10	13	24.5	4	31	3.5	36
GN 300.5-30-M6-50-*	30	M 6	50	10	13	24.5	4	31	3.5	38
GN 300.5-45-M4-12-*	45	M 4	12	10	13	24.5	4	34	3.5	42
GN 300.5-45-M4-16-*	45	M 4	16	10	13	24.5	4	34	3.5	42
GN 300.5-45-M4-20-*	45	M 4	20	10	13	24.5	4	34	3.5	43
GN 300.5-45-M4-25-*	45	M 4	25	10	13	24.5	4	34	3.5	43
GN 300.5-45-M4-32-*	45	M 4	32	10	13	24.5	4	34	3.5	43
GN 300.5-45-M5-12-*	45	M 5	12	10	13	24.5	4	34	3.5	42
GN 300.5-45-M5-16-*	45	M 5	16	10	13	24.5	4	34	3.5	43
GN 300.5-45-M5-20-*	45	M 5	20	10	13	24.5	4	34	3.5	43
GN 300.5-45-M5-25-*	45	M 5	25	10	13	24.5	4	34	3.5	44
GN 300.5-45-M5-32-*	45	M 5	32	10	13	24.5	4	34	3.5	45
GN 300.5-45-M5-40-*	45	M 5	40	10	13	24.5	4	34	3.5	46
GN 300.5-45-M5-50-*	45	M 5	50	10	13	24.5	4	34	3.5	47
GN 300.5-45-M6-12-*	45	M 6	12	10	13	24.5	4	34	3.5	43
GN 300.5-45-M6-16-*	45	M 6	16	10	13	24.5	4	34	3.5	44
GN 300.5-45-M6-20-*	45	M 6	20	10	13	24.5	4	34	3.5	44
GN 300.5-45-M6-25-*	45	M 6	25	10	13	24.5	4	34	3.5	45
GN 300.5-45-M6-32-*	45	M 6	32	10	13	24.5	4	34	3.5	47
GN 300.5-45-M6-40-*	45	M 6	40	10	13	24.5	4	34	3.5	48
GN 300.5-45-M6-50-*	45	M 6	50	10	13	24.5	4	34	3.5	49
GN 300.5-63-M6-16-*	63	M 6	16	13.5	17.5	31	6.5	45	4	95
GN 300.5-63-M6-20-*	63	M 6	20	13.5	17.5	31	6.5	45	4	96
GN 300.5-63-M6-25-*	63	M 6	25	13.5	17.5	31	6.5	45	4	97
GN 300.5-63-M6-32-*	63	M 6	32	13.5	17.5	31	6.5	45	4	99
GN 300.5-63-M6-40-*	63	M 6	40	13.5	17.5	31	6.5	45	4	100
GN 300.5-63-M6-50-*	63	M 6	50	13.5	17.5	31	6.5	45	4	101
GN 300.5-63-M6-63-*	63	M 6	63	13.5	17.5	31	6.5	45	4	103

GN 300.5-With Threaded Stud

STAINLESS STEEL

Description	l1	d1	l2	d3	d4	h1	h2	h3	h4 Stroke	Weight
GN 300.5-63-M8-16-*	63	M 8	16	13.5	17.5	31	6.5	45	4	98
GN 300.5-63-M8-20-*	63	M 8	20	13.5	17.5	31	6.5	45	4	99
GN 300.5-63-M8-25-*	63	M 8	25	13.5	17.5	31	6.5	45	4	101
GN 300.5-63-M8-32-*	63	M 8	32	13.5	17.5	31	6.5	45	4	103
GN 300.5-63-M8-40-*	63	M 8	40	13.5	17.5	31	6.5	45	4	105
GN 300.5-63-M8-50-*	63	M 8	50	13.5	17.5	31	6.5	45	4	106
GN 300.5-63-M8-63-*	63	M 8	63	13.5	17.5	31	6.5	45	4	113
GN 300.5-78-M8-20-*	78	M 8	20	16	21	36	8	54	4	157
GN 300.5-78-M8-25-*	78	M 8	25	16	21	36	8	54	4	159
GN 300.5-78-M8-32-*	78	M 8	32	16	21	36	8	54	4	161
GN 300.5-78-M8-40-*	78	M 8	40	16	21	36	8	54	4	164
GN 300.5-78-M8-50-*	78	M 8	50	16	21	36	8	54	4	167
GN 300.5-78-M8-63-*	78	M 8	63	16	21	36	8	54	4	170
GN 300.5-78-M8-80-*	78	M 8	80	16	21	36	8	54	4	175
GN 300.5-78-M10-20-*	78	M 10	20	16	21	36	8	54	4	161
GN 300.5-78-M10-25-*	78	M 10	25	16	21	36	8	54	4	163
GN 300.5-78-M10-32-*	78	M 10	32	16	21	36	8	54	4	166
GN 300.5-78-M10-40-*	78	M 10	40	16	21	36	8	54	4	168
GN 300.5-78-M10-50-*	78	M 10	50	16	21	36	8	54	4	176
GN 300.5-78-M10-63-*	78	M 10	63	16	21	36	8	54	4	183
GN 300.5-78-M10-80-*	78	M 10	80	16	21	36	8	54	4	190
GN 300.5-78-M12-20-*	78	M 12	20	16	21	36	8	54	4	165
GN 300.5-78-M12-25-*	78	M 12	25	16	21	36	8	54	4	168
GN 300.5-78-M12-32-*	78	M 12	32	16	21	36	8	54	4	174
GN 300.5-78-M12-40-*	78	M 12	40	16	21	36	8	54	4	180
GN 300.5-78-M12-50-*	78	M 12	50	16	21	36	8	54	4	187
GN 300.5-78-M12-63-*	78	M 12	63	16	21	36	8	54	4	195
GN 300.5-78-M12-80-*	78	M 12	80	16	21	36	8	54	4	207
GN 300.5-92-M10-20-*	92	M 10	20	19	24	43	11	64	4	247
GN 300.5-92-M10-25-*	92	M 10	25	19	24	43	11	64	4	250
GN 300.5-92-M10-32-*	92	M 10	32	19	24	43	11	64	4	254
GN 300.5-92-M10-40-*	92	M 10	40	19	24	43	11	64	4	258
GN 300.5-92-M10-50-*	92	M 10	50	19	24	43	11	64	4	264
GN 300.5-92-M10-63-*	92	M 10	63	19	24	43	11	64	4	269
GN 300.5-92-M10-80-*	92	M 10	80	19	24	43	11	64	4	280
GN 300.5-92-M12-20-*	92	M 12	20	19	24	43	11	64	4	252
GN 300.5-92-M12-25-*	92	M 12	25	19	24	43	11	64	4	257
GN 300.5-92-M12-32-*	92	M 12	32	19	24	43	11	64	4	262
GN 300.5-92-M12-40-*	92	M 12	40	19	24	43	11	64	4	267
GN 300.5-92-M12-50-*	92	M 12	50	19	24	43	11	64	4	273
GN 300.5-92-M12-63-*	92	M 12	63	19	24	43	11	64	4	284
GN 300.5-92-M12-80-*	92	M 12	80	19	24	43	11	64	4	295

* Weight Type AS