

Adjustable Hand Levers

**Stainless Steel, Polished,
with Internal Thread / Fitting Bore,
with Threaded Stud**

SPECIFICATION

Types

- Type **AS**: With external hex
- Type **IS**: With internal hexalobular

Handle

Stainless steel precision casting AISI CF-8
Polished

Insert / Retaining screw

Stainless steel AISI 303

Pressure spring

Stainless steel AISI 301

INFORMATION

Adjustable hand levers GN 300.6 are ideal whenever parts have to be clamped in a confined space or in a particular lever position. The screw insert is connected to the handle via serrations and can easily be disengaged.


When the handle is lifted (pulled), the serration is released, and the hand lever can be relocated into any required position. On releasing the handle, it will automatically engage again.

The geometry of type AS is designed to prevent the accumulation of dirt and simplify cleaning.



TECHNICAL INFORMATION

- ISO-Fundamental Tolerances (see page A21)
- Stainless Steel Characteristics (see page A26)

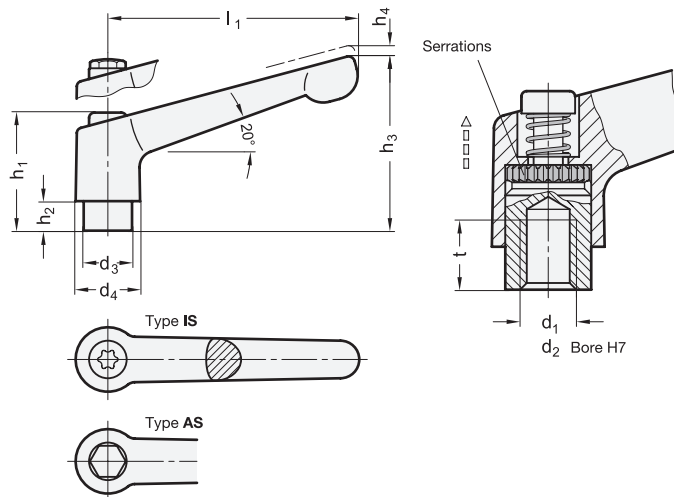

* Complete with

AS

With external hex

IS

With internal hexalobular

GN 300.6-With Internal Thread / Fitting Bore

STAINLESS STEEL

Description	l1	d1	d2 H7	d3	d4	h1	h2	h3	h4 Stroke	t min.	
GN 300.6-30-M3-*	30	M 3	-	10	13	24.5	4	31	3.5	8	25
GN 300.6-30-M4-*	30	M 4	-	10	13	24.5	4	31	3.5	8	31
GN 300.6-30-M5-*	30	M 5	-	10	13	24.5	4	31	3.5	8	29
GN 300.6-30-M6-*	30	M 6	-	10	13	24.5	4	31	3.5	8	30
GN 300.6-30-B5-*	30	-	B 5	10	13	24.5	4	31	3.5	8	25
GN 300.6-30-B6-*	30	-	B 6	10	13	24.5	4	31	3.5	8	25
GN 300.6-45-M4-*	45	M 4	-	10	13	24.5	4	34	3.5	8	42
GN 300.6-45-M5-*	45	M 5	-	10	13	24.5	4	34	3.5	8	40
GN 300.6-45-M6-*	45	M 6	-	10	13	24.5	4	34	3.5	8	40
GN 300.6-45-B5-*	45	-	B 5	10	13	24.5	4	34	3.5	8	35
GN 300.6-45-B6-*	45	-	B 6	10	17.5	24.5	4	34	3.5	8	35
GN 300.6-63-M6-*	63	M 6	-	13.5	17.5	31	6.5	45	4	11	80
GN 300.6-63-M8-*	63	M 8	-	13.5	17.5	31	6.5	45	4	11	80

GN 300.6-With Internal Thread / Fitting Bore

STAINLESS STEEL

Description	l1	d1	d2 H7	d3	d4	h1	h2	h3	h4 Stroke	t min.	
GN 300.6-63-B8-*	63	-	B 8	13.5	21	31	6.5	45	4	11	87
GN 300.6-78-B8-*	78	-	B 8	16	21	36	8	54	4	14	144
GN 300.6-78-B10-*	78	-	B 10	16	21	36	8	54	4	14	146
GN 300.6-78-M8-*	78	M 8	-	16	21	36	8	54	4	14	140
GN 300.6-78-M10-*	78	M 10	-	16	21	36	8	54	4	14	138
GN 300.6-78-M12-*	78	M 12	-	16	24	36	8	54	4	14	146
GN 300.6-92-M10-*	92	M 10	-	19	24	43	11	64	4	17	220
GN 300.6-92-M12-*	92	M 12	-	19	24	43	11	64	4	17	216
GN 300.6-92-B12-*	92	-	B 12	19	-	43	11	64	4	17	327

* Weight Type AS


* Complete with

AS	IS
With external hex	With internal hexalobular

GN 300.6-With Threaded Stud

STAINLESS STEEL

Description	l1	d1	l2	d3	d4	h1	h2	h3	h4 Stroke	
GN 300.6-30-M3-6-*	30	M 3	6	10	13	24.5	4	31	3.5	31
GN 300.6-30-M3-8-*	30	M 3	8	10	13	24.5	4	31	3.5	31
GN 300.6-30-M3-10-*	30	M 3	10	10	13	24.5	4	31	3.5	32
GN 300.6-30-M3-12-*	30	M 3	12	10	13	24.5	4	31	3.5	32
GN 300.6-30-M3-16-*	30	M 3	16	10	13	24.5	4	31	3.5	33
GN 300.6-30-M4-12-*	30	M 4	12	10	13	24.5	4	31	3.5	32
GN 300.6-30-M4-16-*	30	M 4	16	10	13	24.5	4	31	3.5	32
GN 300.6-30-M4-20-*	30	M 4	20	10	13	24.5	4	31	3.5	32
GN 300.6-30-M4-25-*	30	M 4	25	10	13	24.5	4	31	3.5	33
GN 300.6-30-M4-32-*	30	M 4	32	10	13	24.5	4	31	3.5	33
GN 300.6-30-M5-12-*	30	M 5	12	10	13	24.5	4	31	3.5	32
GN 300.6-30-M6-12-*	30	M 6	12	10	13	24.5	4	31	3.5	33
GN 300.6-30-M5-16-*	30	M 5	16	10	13	24.5	4	31	3.5	33
GN 300.6-30-M6-16-*	30	M 6	16	10	13	24.5	4	31	3.5	34
GN 300.6-30-M5-20-*	30	M 5	20	10	13	24.5	4	31	3.5	33
GN 300.6-30-M6-20-*	30	M 6	20	10	13	24.5	4	31	3.5	34
GN 300.6-30-M5-25-*	30	M 5	25	10	13	24.5	4	31	3.5	34
GN 300.6-30-M6-25-*	30	M 6	25	10	13	24.5	4	31	3.5	35
GN 300.6-30-M5-32-*	30	M 5	32	10	13	24.5	4	31	3.5	35
GN 300.6-30-M6-32-*	30	M 6	32	10	13	24.5	4	31	3.5	40
GN 300.6-30-M5-40-*	30	M 5	40	10	13	24.5	4	31	3.5	36
GN 300.6-30-M6-40-*	30	M 6	40	10	13	24.5	4	31	3.5	38
GN 300.6-30-M5-50-*	30	M 5	50	10	13	24.5	4	31	3.5	33
GN 300.6-30-M6-50-*	30	M 6	50	10	13	24.5	4	31	3.5	39
GN 300.6-45-M4-12-*	45	M 4	12	10	13	24.5	4	34	3.5	43
GN 300.6-45-M4-16-*	45	M 4	16	10	13	24.5	4	34	3.5	43
GN 300.6-45-M4-20-*	45	M 4	20	10	13	24.5	4	34	3.5	41
GN 300.6-45-M4-25-*	45	M 4	25	10	13	24.5	4	34	3.5	44
GN 300.6-45-M4-32-*	45	M 4	32	10	13	24.5	4	34	3.5	44
GN 300.6-45-M5-12-*	45	M 5	12	10	13	24.5	4	34	3.5	40
GN 300.6-45-M5-16-*	45	M 5	16	10	13	24.5	4	34	3.5	40
GN 300.6-45-M5-20-*	45	M 5	20	10	13	24.5	4	34	3.5	40
GN 300.6-45-M5-25-*	45	M 5	25	10	13	24.5	4	34	3.5	40
GN 300.6-45-M5-32-*	45	M 5	32	10	13	24.5	4	34	3.5	70
GN 300.6-45-M5-40-*	45	M 5	40	10	13	24.5	4	34	3.5	47
GN 300.6-45-M5-50-*	45	M 5	50	10	13	24.5	4	34	3.5	44
GN 300.6-45-M6-12-*	45	M 6	12	10	13	24.5	4	34	3.5	40
GN 300.6-45-M6-16-*	45	M 6	16	10	13	24.5	4	34	3.5	40
GN 300.6-45-M6-20-*	45	M 6	20	10	13	24.5	4	34	3.5	43
GN 300.6-45-M6-25-*	45	M 6	25	10	13	24.5	4	34	3.5	40
GN 300.6-45-M6-32-*	45	M 6	32	10	13	24.5	4	34	3.5	40
GN 300.6-45-M6-40-*	45	M 6	40	10	13	24.5	4	34	3.5	60
GN 300.6-45-M6-50-*	45	M 6	50	10	13	24.5	4	34	3.5	50
GN 300.6-63-M6-16-*	63	M 6	16	13.5	17.5	31	6.5	45	4	100
GN 300.6-63-M6-20-*	63	M 6	20	13.5	17.5	31	6.5	45	4	90
GN 300.6-63-M6-25-*	63	M 6	25	13.5	17.5	31	6.5	45	4	90
GN 300.6-63-M6-32-*	63	M 6	32	13.5	17.5	31	6.5	45	4	100
GN 300.6-63-M6-40-*	63	M 6	40	13.5	17.5	31	6.5	45	4	100
GN 300.6-63-M6-50-*	63	M 6	50	13.5	17.5	31	6.5	45	4	100
GN 300.6-63-M6-63-*	63	M 6	63	13.5	17.5	31	6.5	45	4	100

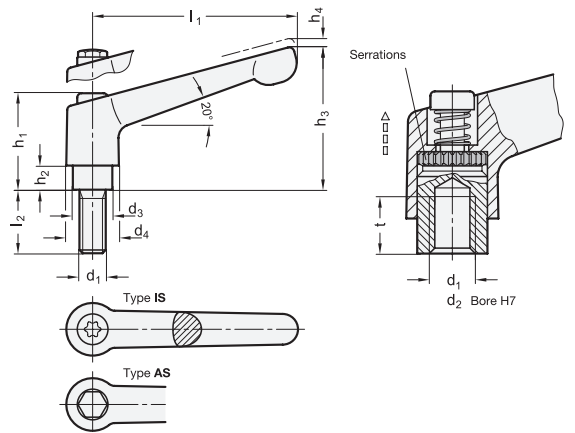

GN 300.6-With Threaded Stud

STAINLESS STEEL

Description	l1	d1	l2	d3	d4	h1	h2	h3	h4 Stroke	
GN 300.6-63-M8-16-*	63	M 8	16	13.5	17.5	31	6.5	45	4	100
GN 300.6-63-M8-20-*	63	M 8	20	13.5	17.5	31	6.5	45	4	93
GN 300.6-63-M8-25-*	63	M 8	25	13.5	17.5	31	6.5	45	4	100
GN 300.6-63-M8-32-*	63	M 8	32	13.5	17.5	31	6.5	45	4	100
GN 300.6-63-M8-40-*	63	M 8	40	13.5	17.5	31	6.5	45	4	100
GN 300.6-63-M8-50-*	63	M 8	50	13.5	17.5	31	6.5	45	4	100
GN 300.6-63-M8-63-*	63	M 8	63	13.5	17.5	31	6.5	45	4	100
GN 300.6-78-M8-20-*	78	M 8	20	16	21	36	8	54	4	160
GN 300.6-78-M8-25-*	78	M 8	25	16	21	36	8	54	4	140
GN 300.6-78-M8-32-*	78	M 8	32	16	21	36	8	54	4	150
GN 300.6-78-M8-40-*	78	M 8	40	16	21	36	8	54	4	200
GN 300.6-78-M8-50-*	78	M 8	50	16	21	36	8	54	4	168
GN 300.6-78-M8-63-*	78	M 8	63	16	21	36	8	54	4	163
GN 300.6-78-M10-20-*	78	M 10	20	16	21	36	8	54	4	160
GN 300.6-78-M10-25-*	78	M 10	25	16	21	36	8	54	4	160
GN 300.6-78-M10-32-*	78	M 10	32	16	21	36	8	54	4	160
GN 300.6-78-M10-40-*	78	M 10	40	16	21	36	8	54	4	160
GN 300.6-78-M10-50-*	78	M 10	50	16	21	36	8	54	4	170
GN 300.6-78-M10-63-*	78	M 10	63	16	21	36	8	54	4	180
GN 300.6-78-M10-80-*	78	M 10	80	16	21	36	8	54	4	150
GN 300.6-78-M12-20-*	78	M 12	20	16	21	36	8	54	4	165
GN 300.6-78-M12-25-*	78	M 12	25	16	21	36	8	54	4	168
GN 300.6-78-M12-32-*	78	M 12	32	16	21	36	8	54	4	174
GN 300.6-78-M12-40-*	78	M 12	40	16	21	36	8	54	4	180
GN 300.6-78-M12-50-*	78	M 12	50	16	21	36	8	54	4	200
GN 300.6-78-M12-63-*	78	M 12	63	16	21	36	8	54	4	195
GN 300.6-78-M12-80-*	78	M 12	80	16	21	36	8	54	4	207
GN 300.6-92-M10-20-*	92	M 10	20	19	24	43	11	64	4	240
GN 300.6-92-M10-25-*	92	M 10	25	19	24	43	11	64	4	200
GN 300.6-92-M10-32-*	92	M 10	32	19	24	43	11	64	4	240
GN 300.6-92-M10-40-*	92	M 10	40	19	24	43	11	64	4	260
GN 300.6-92-M10-50-*	92	M 10	50	19	24	43	11	64	4	260
GN 300.6-92-M10-63-*	92	M 10	63	19	24	43	11	64	4	264
GN 300.6-92-M10-80-*	92	M 10	80	19	24	43	11	64	4	272
GN 300.6-92-M12-20-*	92	M 12	20	19	24	43	11	64	4	250
GN 300.6-92-M12-25-*	92	M 12	25	19	24	43	11	64	4	240
GN 300.6-92-M12-32-*	92	M 12	32	19	24	43	11	64	4	240
GN 300.6-92-M12-40-*	92	M 12	40	19	24	43	11	64	4	260
GN 300.6-92-M12-50-*	92	M 12	50	19	24	43	11	64	4	260
GN 300.6-92-M12-63-*	92	M 12	63	19	24	43	11	64	4	260
GN 300.6-92-M12-80-*	92	M 12	80	19	24	43	11	64	4	294

* Weight Type AS