

Cabinet U-Handles

Steel / Stainless Steel / Aluminum

SPECIFICATION

Version in Steel Handle

Steel

- Powder coated
Black, RAL 9005, textured finish **SW**
- Chrome plated **CR**
- Blackened **BT**

Location disks

Zinc die casting, nickel plated

Version in Stainless steel Stainless steel NI

- AISI 303 for $d_1 = 6, 8, 10$
- AISI 304 for $d_1 = 12, 16$
- Matte shot-blasted finish **GS**
- Electropolished **EP**
- Location disks for $d_1 = 6, 8, 10$
Stainless steel AISI 303

Stainless steel AISI 316L A4

- Matte shot-blasted finish **GS**
- Location disks
Stainless steel AISI 316L

Version in Aluminum Aluminum AL

- Powder coated
 - Black, RAL 9005, textured finish **SW**
 - Silver, RAL 9006, textured finish **SR**
 - Red, RAL 3000, textured finish **RS**
- Anodized, natural color **EL**
- Location disks for $d_1 = 8, 10$
Zinc die casting, nickel plated



INFORMATION

Cabinet U-handles GN 425 are manufactured from a bent stainless steel, steel or aluminum profile. Cabinet U-handles with $\varnothing d_1 = 6, 8$ and 10 are delivered with two location disks to ensure proper contact of the handle even in the case of large connecting holes. The disks are loosely enclosed.


The stainless steel version is preferred over the chrome-plated version for outdoor applications.

ACCESSORY

- GN 181 Fastening Sets (Mounting from the Operator's Side) (see page 488)

TECHNICAL INFORMATION

- Load Rating Information (see page A35)
- Stainless Steel Characteristics (see page A26)

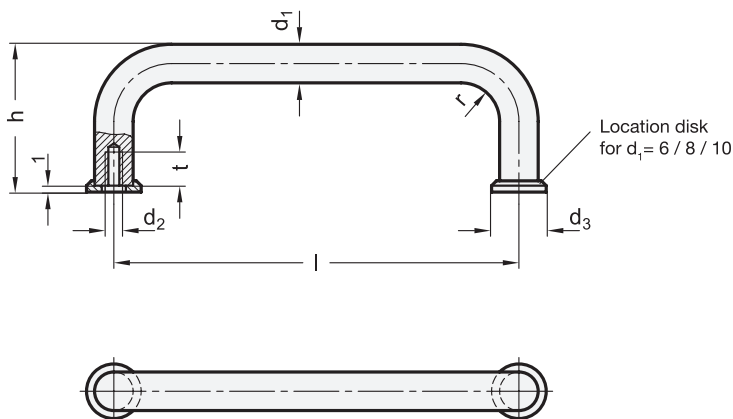

* Complete with

SWCRBT

GN 425-ST

Description	d1	Length l	d2	d3	h	r	t min.	⚖
GN 425-6-32-*	6	32	M 3	9	26	7	6	16
GN 425-6-45-*	6	45	M 3	9	26	7	6	19
GN 425-6-55-*	6	55**	M 3	9	26	7	6	22
GN 425-6-64-*	6	64	M 3	9	26	7	6	24
GN 425-6-88-*	6	88**	M 3	9	26	7	6	29
GN 425-8-55-*	8	55**	M 4	12	35	10	8	40
GN 425-8-64-*	8	64	M 4	12	35	10	8	43
GN 425-8-88-*	8	88**	M 4	12	35	10	8	52
GN 425-8-96-*	8	96	M 4	12	35	10	8	57
GN 425-8-100-*	8	100	M 4	12	35	10	8	58
GN 425-8-120-*	8	120**	M 4	12	35	10	8	68
GN 425-8-128-*	8	128	M 4	12	35	10	8	70
GN 425-10-88-*	10	88**	M 5	15	43	12	12	87
GN 425-10-100-*	10	100	M 5	15	43	12	12	98
GN 425-10-120-*	10	120**	M 5	15	43	12	12	109
GN 425-10-180-*	10	180**	M 5	15	43	12	12	144
GN 425-10-200-*	10	200	M 5	15	43	12	12	160
GN 425-10-235-*	10	235**	M 5	15	43	12	12	183
GN 425-12-125-*	12	125	M 6	-	51	14	12	190
GN 425-12-160-*	12	160	M 6	-	51	14	12	198
GN 425-12-200-*	12	200	M 6	-	51	14	12	231
GN 425-12-250-*	12	250	M 6	-	51	14	12	275
GN 425-16-160-*	16	160	M 6	-	59	18	12	371
GN 425-16-200-*	16	200	M 6	-	59	18	12	430
GN 425-16-250-*	16	250	M 6	-	59	18	12	503
GN 425-16-300-*	16	300	M 6	-	59	18	12	582

Weight SW
** suitable for 19" rack and enclosure layout

* Complete with

GSEP


GN 425-NI

STAINLESS STEEL

Description	d1	Length l	d2	d3	h	r	t min.	⚖
GN 425-NI-6-32-*	6	32	M 3	9	26	7	6	16
GN 425-NI-6-45-*	6	45	M 3	9	26	7	6	19
GN 425-NI-6-55-*	6	55**	M 3	9	26	7	6	22
GN 425-NI-6-64-*	6	64	M 3	9	26	7	6	24
GN 425-NI-6-88-*	6	88**	M 3	9	26	7	6	29
GN 425-NI-8-55-*	8	55**	M 4	12	35	10	8	40
GN 425-NI-8-64-*	8	64	M 4	12	35	10	8	43
GN 425-NI-8-88-*	8	88**	M 4	12	35	10	8	52
GN 425-NI-8-96-*	8	96	M 4	12	35	10	8	57
GN 425-NI-8-100-*	8	100	M 4	12	35	10	8	58
GN 425-NI-8-120-*	8	120**	M 4	12	35	10	8	68
GN 425-NI-8-128-*	8	128	M 4	12	35	10	8	70
GN 425-NI-10-88-*	10	88**	M 5	15	43	12	12	87
GN 425-NI-10-100-*	10	100	M 5	15	43	12	12	98
GN 425-NI-10-120-*	10	120**	M 5	15	43	12	12	109
GN 425-NI-10-180-*	10	180**	M 5	15	43	12	12	144
GN 425-NI-10-200-*	10	200	M 5	15	43	12	12	160
GN 425-NI-10-235-*	10	235**	M 5	15	43	12	12	183
GN 425-NI-12-125-*	12	125	M 6	-	51	14	12	190
GN 425-NI-12-160-*	12	160	M 6	-	51	14	12	198
GN 425-NI-12-200-*	12	200	M 6	-	51	14	12	231
GN 425-NI-12-250-*	12	250	M 6	-	51	14	12	275
GN 425-NI-16-160-*	16	160	M 6	-	59	18	12	371
GN 425-NI-16-200-*	16	200	M 6	-	59	18	12	430
GN 425-NI-16-250-*	16	250	M 6	-	59	18	12	503
GN 425-NI-16-300-*	16	300	M 6	-	59	18	12	582

Weight GS
** suitable for 19" rack and enclosure layout



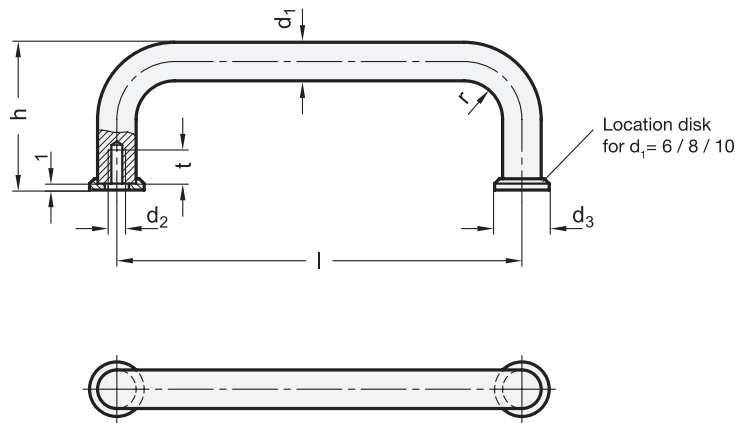

GN 425-A4

STAINLESS STEEL

Description	d_1	Length l	d_2	d_3	h	r	t min.	⚖
GN 425-A4-10-88-GS	10	88**	M 5	15	43	12	12	87
GN 425-A4-10-100-GS	10	100	M 5	15	43	12	12	98
GN 425-A4-10-120-GS	10	120**	M 5	15	43	12	12	109
GN 425-A4-10-180-GS	10	180**	M 5	15	43	12	12	144
GN 425-A4-10-200-GS	10	200	M 5	15	43	12	12	160
GN 425-A4-10-235-GS	10	235**	M 5	15	43	12	12	183

* Complete with

SW SR RS EL

GN 425-AL

Description	d_1	Length l	d_2	d_3	h	r	t min.	⚖
GN 425-AL-8-55-*	8	55**	M 4	12	35	10	8	17
GN 425-AL-8-64-*	8	64	M 4	12	35	10	8	18
GN 425-AL-8-88-*	8	88**	M 4	12	35	10	8	20
GN 425-AL-8-96-*	8	96	M 4	12	35	10	8	23
GN 425-AL-8-100-*	8	100	M 4	12	35	10	8	24
GN 425-AL-8-120-*	8	120**	M 4	12	35	10	8	26
GN 425-AL-8-128-*	8	128	M 4	12	35	10	8	28
GN 425-AL-10-88-*	10	88**	M 5	15	43	12	12	32
GN 425-AL-10-100-*	10	100	M 5	15	43	12	12	38
GN 425-AL-10-120-*	10	120**	M 5	15	43	12	12	41
GN 425-AL-10-180-*	10	180**	M 5	15	43	12	12	55
GN 425-AL-10-200-*	10	200	M 5	15	43	12	12	57
GN 425-AL-10-235-*	10	235**	M 5	15	43	12	12	59
GN 425-AL-12-125-*	12	125	M 6	-	51	14	12	60
GN 425-AL-12-160-*	12	160	M 6	-	51	14	12	71
GN 425-AL-12-200-*	12	200	M 6	-	51	14	12	83
GN 425-AL-12-250-*	12	250	M 6	-	51	14	12	102
GN 425-AL-16-160-*	16	160	M 6	-	59	18	12	128
GN 425-AL-16-200-*	16	200	M 6	-	59	18	12	146
GN 425-AL-16-250-*	16	250	M 6	-	59	18	12	180
GN 425-AL-16-300-*	16	300	M 6	-	59	18	12	205

Weight SW

** suitable for 19" rack and enclosure layout