

Equipment Feet

Aluminum / Stainless Steel, with Rubber Cap

SPECIFICATION

Type

- Type **R**: With cover cap, non-slip

Base body

- Aluminum **AL**
Turned, anodized, black **S**
- Stainless steel AISI 316L **A4**
Turned **M**

Cover cap

- Thermoplastic elastomer (TPE)
- Hardness \approx 75 Shore A
- Black



INFORMATION

Equipment feet GN 440 are used to set up devices, smaller machines, or fixtures, on worktops or tables. The non-slip cover cap increases stability, reduces wear on the underlying surface and covers the mounting hole from below.

They can be installed either from above using the internal thread d_2 or with a socket cap screw ISO 4762 from below using the through hole d_3 . The cover cap is packaged separately and reusable.


The black version ALS offers a discreet appearance and reduces surface reflections. The version A4M is particularly suitable for use in aggressive environments.

ON REQUEST


- $d_1 = 25 / 32$ in stainless steel with ESD cover cap

TECHNICAL INFORMATION

- Plastic Characteristics (see page A2)
- Stainless Steel Characteristics (see page A26)

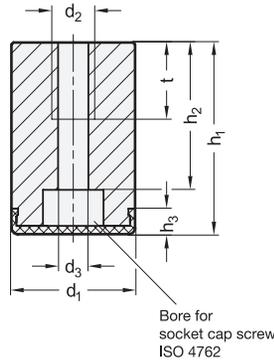

Application examples

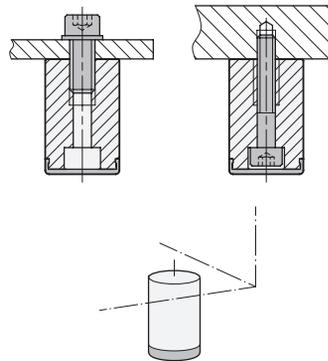

GN 440-AL

Description	d_1	h_1	d_2	d_3 Through hole for screw	h_2	h_3	t min.	Static load capacity in kN	
GN 440-16-16-M4-R-ALS	16	16	M 4	M 3	11	4	8	0.25	7
GN 440-16-24-M4-R-ALS	16	24	M 4	M 3	19	4	8	0.25	11
GN 440-20-20-M5-R-ALS	20	20	M 5	M 4	14	4	10	0.4	14
GN 440-20-30-M5-R-ALS	20	30	M 5	M 4	24	4	10	0.4	22
GN 440-25-25-M6-R-ALS	25	25	M 6	M 5	17	4.7	12	0.7	29
GN 440-25-40-M6-R-ALS	25	40	M 6	M 5	32	4.7	12	0.7	48
GN 440-32-32-M8-R-ALS	32	32	M 8	M 6	23	5.7	16	1.6	62
GN 440-32-50-M8-R-ALS	32	50	M 8	M 6	41	5.7	16	1.6	99

GN 440-A4

STAINLESS STEEL

Description	d_1	h_1	d_2	d_3 Through hole for screw	h_2	h_3	t min.	Static load capacity in kN	
GN 440-16-16-M4-R-A4M	16	16	M 4	M 3	11	4	8	0.25	20
GN 440-16-24-M4-R-A4M	16	24	M 4	M 3	19	4	8	0.25	31
GN 440-20-20-M5-R-A4M	20	20	M 5	M 4	14	4	10	0.4	40
GN 440-20-30-M5-R-A4M	20	30	M 5	M 4	24	4	10	0.4	63
GN 440-25-25-M6-R-A4M	25	25	M 6	M 5	17	4.7	12	0.7	139
GN 440-25-40-M6-R-A4M	25	40	M 6	M 5	32	4.7	12	0.7	288
GN 440-32-32-M8-R-A4M	32	32	M 8	M 6	23	5.7	16	1.6	178
GN 440-32-50-M8-R-A4M	32	50	M 8	M 6	41	5.7	16	1.6	288