

Cranked Handles

Zinc Die Casting

SPECIFICATION

Body

Zinc die casting
Powder coated
Black, textured finish

Revolving handles

Plastic, Polypropylen (PP)
• Black, matte finish
• Spindle steel
Zinc plated, blue passivated

INFORMATION


Cranked handles GN GN 471.1 are used for making adjustments or driving mechanisms.

The crank movement is transmitted via the revolving cylindrical handle. The revolving handle body can be held firmly and securely while cranking.

Cranked handles can also be ordered with cross holes GN 110.

TECHNICAL INFORMATION

- Cross Holes GN 110 (see page A17)
- Squares DIN 79 (see page A16)
- ISO-Fundamental Tolerances (see page A21)
- Plastic Characteristics (see page A2)

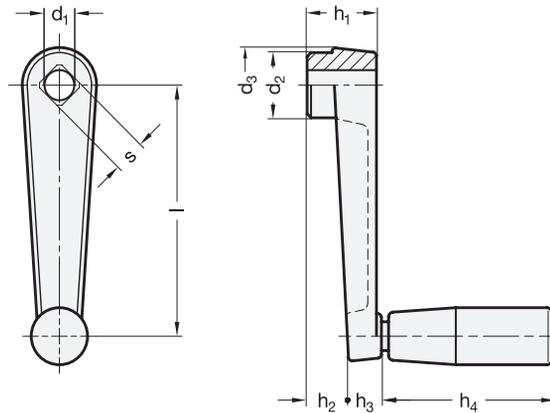

GN 471.1-B

Description	Length l	d1 H7 Bore	d2	d3	h1	h2	h3	h4 ≈	∅ Handle	⚖
GN 471.1-50-B8	50	B 8	16	18	18	10	10	28.5	14	58
GN 471.1-64-B10	64	B 10	19	22	20	11	12	42.5	18	100
GN 471.1-80-B10	80	B 10	23	26	24	14	14	52.5	21	160
GN 471.1-100-B12	100	B 12	27	30	28	17	15	67.5	23	280

GN 471.1-S

Description	Length l	s H11 Square	d2	d3	h1	h2	h3	h4 ≈	∅ Handle	⚖
GN 471.1-50-V8	50	V 8	16	18	18	10	10	28.5	14	58
GN 471.1-64-V10	64	V 10	19	22	20	11	12	42.5	18	95
GN 471.1-80-V10	80	V 10	23	26	24	14	14	52.5	21	162
GN 471.1-100-V12	100	V 12	27	30	28	17	15	67.5	23	270