

Cranked Handles with Retractable Handle

Aluminum

SPECIFICATION

Body


Aluminum

- Powder coated
Black, textured finish
- Contact face of hub machined

Retractable Handle GN 598.3 (see page 585)

Plastic, Polyamide (PA)

- Black, shiny finish
- Retractable Mechanism
Steel, blackened

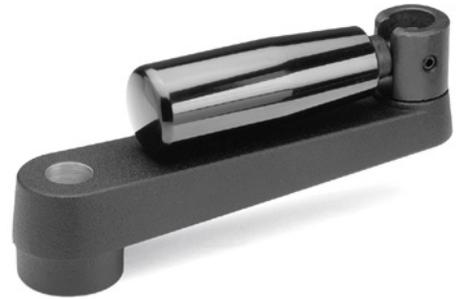

INFORMATION

The handle of the cranked handles with retractable handle GN 471.3 is locked in a tapered bore in the operating position.

For tilting, the handle must first be pulled out of the taper in axial direction.


A pressure spring holds the handle in both end positions. When folded out, it automatically re-engages.

ON REQUEST

- with Retractable Handle GN 598.5 (see page 585)
(Retractable Mechanism Stainless Steel)

TECHNICAL INFORMATION

- Cross Holes GN 110 (see page A17)
- Squares DIN 79 (see page A16)
- ISO-Fundamental Tolerances (see page A21)
- Plastic Characteristics (see page A2)

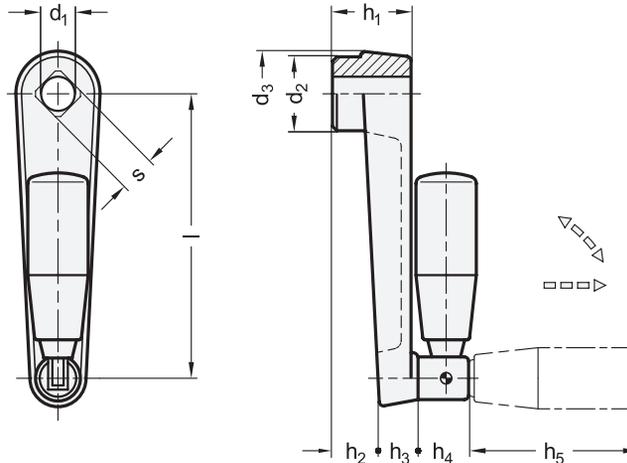

GN 471.3-B

Description	l	d1 H7 Bore	d2	d3	h1	h2	h3	h4	h5 ≈	∅ Handle	⚖
GN 471.3-100-B12	100	B 12	27	30	28	17	13	19.5	67.5	23	160
GN 471.3-125-B14	125	B 14	32	35	34	22	14	19.5	67.5	23	220
GN 471.3-160-B17	160	B 17	35	39	38	26	16	19.5	82.5	26	346

GN 471.3-S

Description	l	s H11 Square	d2	d3	h1	h2	h3	h4	h5 ≈	∅ Handle	⚖
GN 471.3-100-V12	100	V 12	27	30	28	17	13	19.5	67.5	23	190
GN 471.3-125-V14	125	V 14	32	35	34	22	14	19.5	67.5	23	247
GN 471.3-160-V17	160	V 17	35	39	38	26	16	19.5	82.5	26	330