

Cranked Handles with Retractable Handle

Aluminum, Retractable Mechanism Steel

SPECIFICATION

Body

Aluminum

- Powder coated
 - Black, RAL 9005, textured finish **SW**
 - Silver, RAL 9006, textured finish **SR**
- Contact face of hub machined

Cover

Plastic

Light grey

Retractable handle GN 798.3 (see page 586)

Plastic, Polyamide (PA)

- Black, matte finish
- Retractable mechanism
 - Steel, blackened



INFORMATION


The handpiece of the cranked handle GN 472.3 is locked in a tapered bore in the operating position.

For tilting, the handle must first be pulled out of the taper in axial direction.

A compression spring holds the handle in both end positions. When folded out, it automatically re-engages.

TECHNICAL INFORMATION

- Cross Holes GN 110 (see page A17)
- Squares DIN 79 (see page A16)
- ISO-Fundamental Tolerances (see page A21)
- Plastic Characteristics (see page A2)

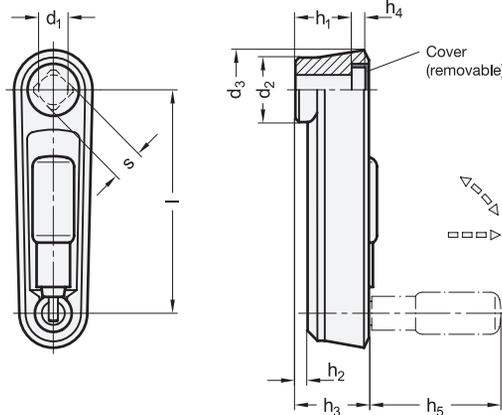

* Complete with



GN 472.3-B

Description	Length l	d1 H7 Bore	d2	d3	h1	h2 ≈	h3	h4	h5 ≈	Ø Handle	⚖
GN 472.3-80-B10-*	80	B 10	23	30	19.5	4	25.5	4.3	43	16	131
GN 472.3-100-B12-*	100	B 12	26.7	35	23.5	5.5	29.5	4.2	57.5	18	180
GN 472.3-125-B14-*	125	B 14	28	37	30.5	10.5	36.5	4.2	76.5	24	305

GN 472.3-S

Description	Length l	s H11 Square	d2	d3	h1	h2 ≈	h3	h4	h5 ≈	Ø Handle	⚖
GN 472.3-80-V10-*	80	V 10	23	30	19.5	4	25.5	4.3	43	16	131
GN 472.3-100-V12-*	100	V 12	26.7	35	23.5	5.5	29.5	4.2	57.5	18	180
GN 472.3-125-V14-*	125	V 14	28	37	30.5	10.5	36.5	4.2	76.5	24	280

Weight SW

