

Clamping kits for swivel clamp mountings

SPECIFICATION

Types

- Type **S**: with cylinder head screw DIN 912
- Type **K**: with adjustable hand levers

Handle

Zinc die casting
plastic coated
silver, RAL 9006, textured finish

Threaded insert, distance sleeve,
centering bushing, threaded bushing
Stainless Steel AISI 303

Cylinder head screw DIN 912
Stainless Steel AISI 304

INFORMATION


With clamping kits GN 511.1 swivel clamp mountings GN 482 (see page 1890) can be combined with T-Swivel clamp mountings GN 483 (see page 1891) and attachment clamp mountings GN 484 (see page 1892) with the same k-dimensions into swivel clamp mounting joints.

The centering bush positions the swivel clamp mountings in relation to each other. During assembly, the knurled threaded bushing is inserted by the clamping screw itself and by pressing into one of the two swivel clamp mountings and so serves to clamp the articulated joint.


The matching clamping kits are shown in the dimensional tables of the appropriate swivel clamp mountings.

TECHNICAL INFORMATION

- Stainless Steel characteristics (see page A26)

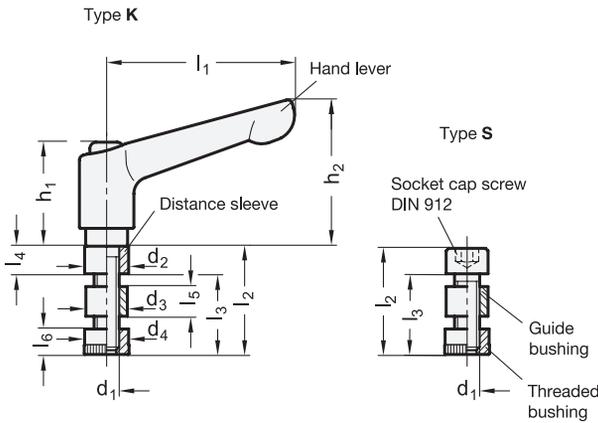

Mounting example

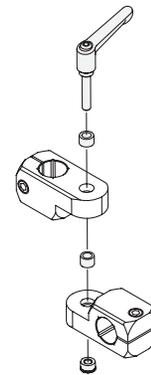

GN 511.1

Description	d1	l2	d2	d3	d4	l1	l3	l4	l5	l6	h1	h2	Swivel clamp mounting k dimension	
GN 511.1-M4-16-K	M 4	16	7.5	6.9	7.5	22	11.5	4.5	4	4	18.5	23	16	30
GN 511.1-M4-16-S	M 4	16	7.5	6.9	7.5	-	11.5	-	4	4	-	-	16	34
GN 511.1-M5-20-K	M 5	20	9	8.4	9	30	14	6	5	5	24.5	30.5	20	12
GN 511.1-M5-20-S	M 5	20	9	8.4	9	-	14	-	5	5	-	-	20	15
GN 511.1-M6-25-K	M 6	25	10.5	9.9	10.5	45	18.5	6.5	7	6	24.5	35	25	120
GN 511.1-M6-25-S	M 6	25	10.5	9.9	10.5	-	18.5	-	7	6	-	-	25	150
GN 511.1-M6-30-K	M 6	30	10.5	9.9	10.5	45	23.5	6.5	7	6	24.5	35	30	150
GN 511.1-M6-30-S	M 6	30	10.5	9.9	10.5	-	23.5	-	7	6	-	-	30	200