

## Three-Lobed Knobs

Stainless Steel

### SPECIFICATION

#### Types

- Type **A**: without bore
- Type **E**: with threaded blind bore
- Type **D**: with threaded through bore
- Type **C**: with plain blind bore H7

Stainless Steel AISI 303  
Stainless Steel AISI 316L (A4)  
matt shot-blasted

### INFORMATION

Stainless Steel-Three lobe knobs GN 5345 have a smooth and sealed surface. They are particularly suitable for use where hygiene requirements are high. Their shape allows relatively high torques to be applied.

### ON REQUEST


- highly polished (PL)

### TECHNICAL INFORMATION

- Cross holes GN 110 (see page A17)
- ISO-Fundamental Tolerances (see page A21)
- Stainless Steel characteristics (see page A26)

## Three-Lobed Knobs

Stainless Steel

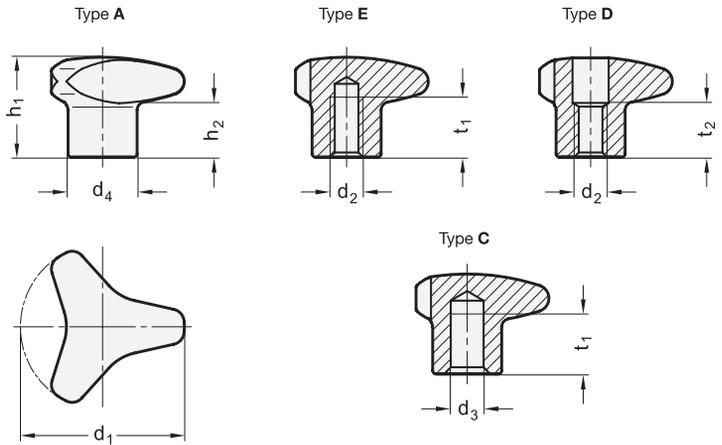

### GN 5345

### STAINLESS STEEL

Description	d1	d2	d3 H7	d4	h1	h2	t1 min.	t2	Δ
GN 5345-40-A	40	-	-	18	26	15	-	-	76
GN 5345-50-A	50	-	-	21	30	17	-	-	127
GN 5345-60-A	60	-	-	25	35	18	-	-	216
GN 5345-40-B8-C	40	-	B 8	18	26	15	15	-	70
GN 5345-50-B10-C	50	-	B 10	21	30	17	18	-	114
GN 5345-60-B12-C	60	-	B 12	25	35	18	22	-	195
GN 5345-40-M6-D	40	M 6	-	18	26	15	-	13	70
GN 5345-40-M8-D	40	M 8	-	18	26	15	-	13	67
GN 5345-50-M8-D	50	M 8	-	21	30	17	-	16	115
GN 5345-50-M10-D	50	M 10	-	21	30	17	-	16	109
GN 5345-60-M10-D	60	M 10	-	25	35	18	-	20	193
GN 5345-60-M12-D	60	M 12	-	25	35	18	-	20	185
GN 5345-40-M6-E	40	M 6	-	18	26	15	12	-	74
GN 5345-40-M8-E	40	M 8	-	18	26	15	15	-	70
GN 5345-50-M8-E	50	M 8	-	21	30	17	15	-	119
GN 5345-50-M10-E	50	M 10	-	21	30	17	18	-	115
GN 5345-60-M10-E	60	M 10	-	25	35	18	18	-	202
GN 5345-60-M12-E	60	M 12	-	25	35	18	22	-	195

### GN 5345.4

### STAINLESS STEEL

Description	d1	d2	d3 H7	d4	h1	h2	t1 min.	t2	Δ
GN 5345.4-40-A	40	-	-	18	26	15	-	-	96
GN 5345.4-50-A	50	-	-	21	30	17	-	-	128
GN 5345.4-60-A	60	-	-	25	35	18	-	-	219
GN 5345.4-40-B8-C	40	-	B 8	18	26	15	15	-	70
GN 5345.4-50-B10-C	50	-	B 10	21	30	17	18	-	115
GN 5345.4-60-B12-C	60	-	B 12	25	35	18	22	-	192
GN 5345.4-40-M6-D	40	M 6	-	18	26	15	-	13	60
GN 5345.4-40-M8-D	40	M 8	-	18	26	15	-	13	67
GN 5345.4-50-M8-D	50	M 8	-	21	30	17	-	16	117
GN 5345.4-50-M10-D	50	M 10	-	21	30	17	-	16	111
GN 5345.4-60-M10-D	60	M 10	-	25	35	18	-	20	197
GN 5345.4-60-M12-D	60	M 12	-	25	35	18	-	20	188
GN 5345.4-40-M6-E	40	M 6	-	18	26	15	12	-	77
GN 5345.4-40-M8-E	40	M 8	-	18	26	15	15	-	71
GN 5345.4-50-M8-E	50	M 8	-	21	30	17	15	-	120
GN 5345.4-50-M10-E	50	M 10	-	21	30	17	18	-	115
GN 5345.4-60-M10-E	60	M 10	-	25	35	18	18	-	202
GN 5345.4-60-M12-E	60	M 12	-	25	35	18	22	-	195