

Stop Locks

Zinc Die Casting, with 4 Indexing Positions (4 x 90°)

SPECIFICATION

Types

- Type **A**: With flange for surface mounting
- Type **B**: With internal thread
- Type **C**: With male thread

Latch

Zinc die casting

Powder coated

- Black, RAL 9005, textured finish **SW**
- Red, RAL 3000, textured finish **RS**
- Orange, RAL 2004, textured finish **OS**

Indexing mechanism

- Zinc casting / plastic for type A
- Steel / plastic for type B / C
- Steel parts
- Zinc plated, blue passivated

Fastening flange for type A


Zinc die casting

Powder coated

Black, matte finish

Hex nut for type C

Steel, zinc plated

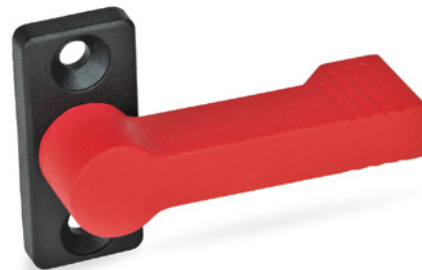


INFORMATION


Stop locks GN 702 are particularly suitable for light-weight applications not exposed to dynamic loads, e.g. for keeping drawers closed.

To mount stop locks of type C, bore holes as shown in the diagram below must be set in the attachment surface. These installation holes are usually made by punching or with laser. For small series and steel sheets below 2 mm thickness, the sheet metal punches GN 123 (see page 1493) are the tool of choice. The mounting bore holes can also be made by drilling / milling.

ACCESSORY

- GN 123 Sheet Metal Punches (see page 1493)

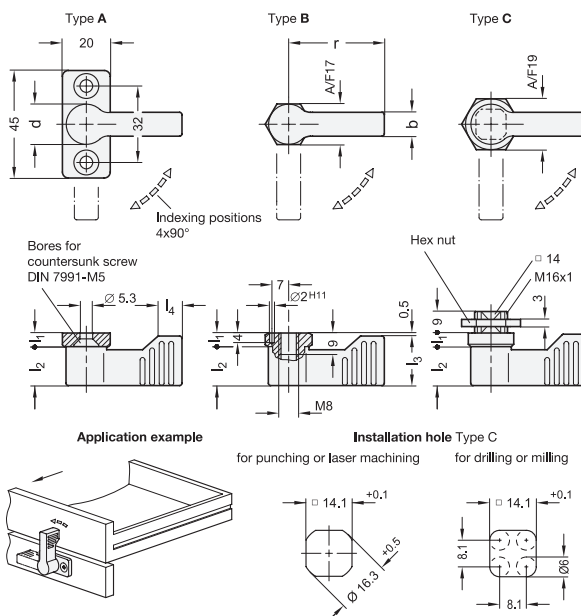

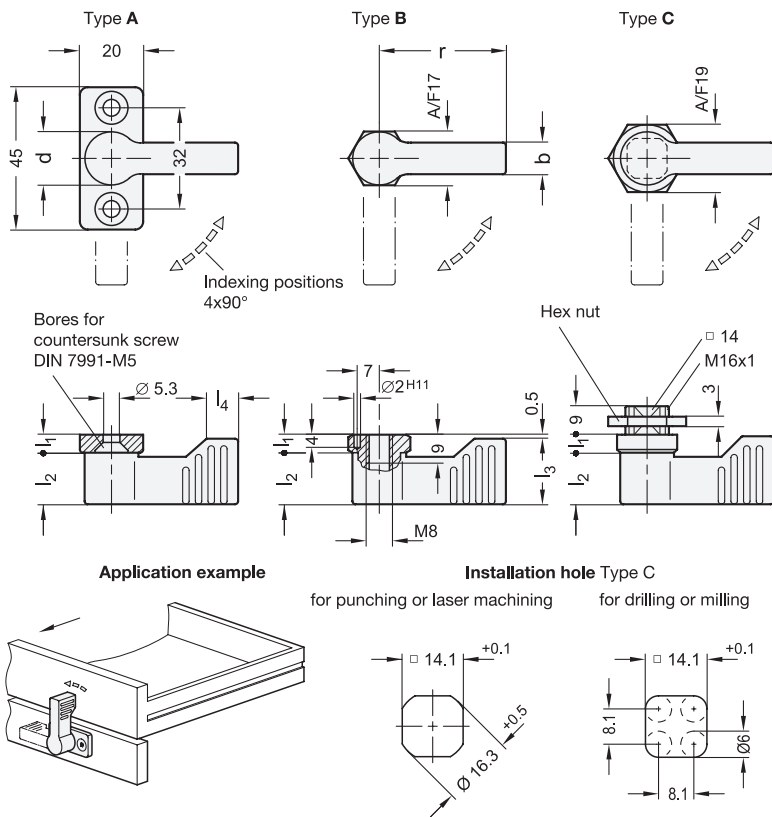

GN 702-A

Description	d	r	b	l1 ≈	l2	l3 min.	l4	⚖
GN 702-17-40-A-SW	17	40	10	5.5	16.5	21.5	11	75
GN 702-17-40-A-RS	17	40	10	5.5	16.5	21.5	11	75
GN 702-17-40-A-OS	17	40	10	5.5	16.5	21.5	11	770
GN 702-17-55-A-SW	17	55	10	5.5	16.5	21.5	11	80
GN 702-17-55-A-RS	17	55	10	5.5	16.5	21.5	11	80
GN 702-17-55-A-OS	17	55	10	5.5	16.5	21.5	11	83

GN 702-B

Description	d	r	b	l1 ≈	l2	l3 min.	l4	⚖
GN 702-17-40-B-SW	17	40	10	5.5	16.5	21.5	11	57
GN 702-17-40-B-RS	17	40	10	5.5	16.5	21.5	11	57
GN 702-17-40-B-OS	17	40	10	5.5	16.5	21.5	11	58
GN 702-17-55-B-SW	17	55	10	5.5	16.5	21.5	11	70
GN 702-17-55-B-RS	17	55	10	5.5	16.5	21.5	11	70
GN 702-17-55-B-OS	17	55	10	5.5	16.5	21.5	11	65

GN 702-C

Description	d	r	b	l1 ≈	l2	l3 min.	l4	⚖
GN 702-17-40-C-SW	17	40	10	5.5	16.5	21.5	11	70
GN 702-17-40-C-RS	17	40	10	5.5	16.5	21.5	11	70
GN 702-17-40-C-OS	17	40	10	5.5	16.5	21.5	11	70
GN 702-17-55-C-SW	17	55	10	5.5	16.5	21.5	11	76
GN 702-17-55-C-RS	17	55	10	5.5	16.5	21.5	11	76
GN 702-17-55-C-OS	17	55	10	5.5	16.5	21.5	11	76