

Knurled Screws

Plastic, Threaded Stud Stainless Steel,
Brass / Plastic / Spherical Pivot

SPECIFICATION

Types

- Type **MS**: Brass pivot
- Type **KU**: Plastic pivot, Polyacetal (POM)
- Type **ZK**: Spherical pivot

Knob

- Plastic, Polyamide (PA)
- Glass fiber reinforced
- Operating temperature -30 °C to +130 °C
- Black, matte finish

Threaded stud

Stainless steel AISI 304

Cover cap

Plastic, Polyamide (PA)
Light gray, matte finish

INFORMATION

Knurled screws GN 7336.5, type MS/KU with brass or plastic pivots are used when pressure dents or damage must be avoided.

Knurled screws GN 7336.5, type ZK feature a spherical pivot whose \varnothing d_s is smaller than the core \varnothing of the thread. The version with spherical pivot is suitable for holding thrust pads GN 631 (see page 940) / GN 631.5 (see page 941), which must be ordered separately.

The knurled screws GN 7336.5 distinguish an attractive design in combination with closed shape (no recess on the underside of the handles).


ACCESSORY

- GN 631 Thrust Pads (Plastic) (see page 940)
- GN 631.5 Thrust Pads (Stainless Steel) (see page 941)

TECHNICAL INFORMATION

- Plastic Characteristics (see page A2)
- Stainless Steel Characteristics (see page A26)



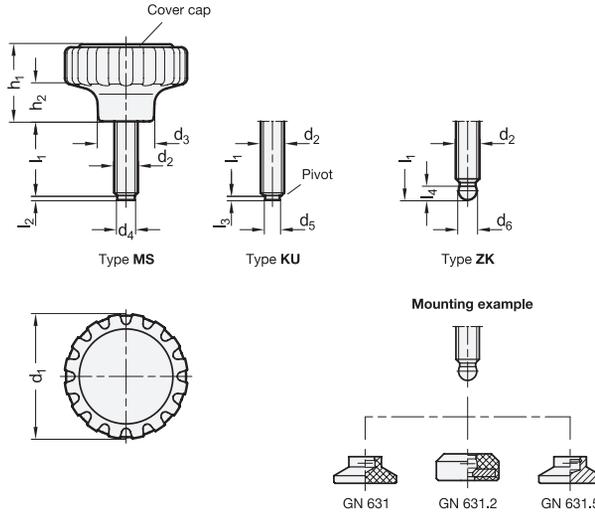

GN 7336.5-MS

Description	d1	d2	l1	d3	d4	d5	d6 +0.05	h1	h2	l2	l3	l4 ≈	l5
GN 7336.5-34-M6-15-MS	34	M 6	15	16	4	3.5	4.5	21	10.5	1	1.3	5.1	16
GN 7336.5-34-M6-20-MS	34	M 6	20	16	4	3.5	4.5	21	10.5	1	1.3	5.1	17
GN 7336.5-34-M6-25-MS	34	M 6	25	16	4	3.5	4.5	21	10.5	1	1.3	5.1	18
GN 7336.5-34-M6-30-MS	34	M 6	30	16	4	3.5	4.5	21	10.5	1	1.3	5.1	19
GN 7336.5-42-M8-20-MS	42	M 8	20	19	6	5	6.1	26	13	1.5	1.6	6.2	30
GN 7336.5-42-M8-25-MS	42	M 8	25	19	6	5	6.1	26	13	1.5	1.6	6.2	32
GN 7336.5-42-M8-30-MS	42	M 8	30	19	6	5	6.1	26	13	1.5	1.6	6.2	34
GN 7336.5-42-M8-40-MS	42	M 8	40	19	6	5	6.1	26	13	1.5	1.6	6.2	37
GN 7336.5-53-M10-25-MS	53	M 10	25	24	8	6.5	7.8	32	16	2	1.9	7.3	58
GN 7336.5-53-M10-30-MS	53	M 10	30	24	8	6.5	7.8	32	16	2	1.9	7.3	61
GN 7336.5-53-M10-40-MS	53	M 10	40	24	8	6.5	7.8	32	16	2	1.9	7.3	64
GN 7336.5-53-M10-50-MS	53	M 10	50	24	8	6.5	7.8	32	16	2	1.9	7.3	70

GN 7336.5-KU

Description	d1	d2	l1	d3	d4	d5	d6 +0.05	h1	h2	l2	l3	l4 ≈	l5
GN 7336.5-34-M6-15-KU	34	M 6	15	16	4	3.5	4.5	21	10.5	1	1.3	5.1	22
GN 7336.5-34-M6-20-KU	34	M 6	20	16	4	3.5	4.5	21	10.5	1	1.3	5.1	17
GN 7336.5-34-M6-25-KU	34	M 6	25	16	4	3.5	4.5	21	10.5	1	1.3	5.1	18
GN 7336.5-34-M6-30-KU	34	M 6	30	16	4	3.5	4.5	21	10.5	1	1.3	5.1	18
GN 7336.5-42-M8-20-KU	42	M 8	20	19	6	5	6.1	26	13	1.5	1.6	6.2	30
GN 7336.5-42-M8-25-KU	42	M 8	25	19	6	5	6.1	26	13	1.5	1.6	6.2	32
GN 7336.5-42-M8-30-KU	42	M 8	30	19	6	5	6.1	26	13	1.5	1.6	6.2	33
GN 7336.5-42-M8-40-KU	42	M 8	40	19	6	5	6.1	26	13	1.5	1.6	6.2	36
GN 7336.5-53-M10-25-KU	53	M 10	25	24	8	6.5	7.8	32	16	2	1.9	7.3	57
GN 7336.5-53-M10-30-KU	53	M 10	30	24	8	6.5	7.8	32	16	2	1.9	7.3	59
GN 7336.5-53-M10-40-KU	53	M 10	40	24	8	6.5	7.8	32	16	2	1.9	7.3	64
GN 7336.5-53-M10-50-KU	53	M 10	50	24	8	6.5	7.8	32	16	2	1.9	7.3	69

GN 7336.5-ZK

Description	d1	d2	l1	d3	d4	d5	d6 +0.05	h1	h2	l2	l3	l4 ≈	l5
GN 7336.5-34-M6-15-ZK	34	M 6	15	16	4	3.5	4.5	21	10.5	1	1.3	5.1	16
GN 7336.5-34-M6-20-ZK	34	M 6	20	16	4	3.5	4.5	21	10.5	1	1.3	5.1	17
GN 7336.5-34-M6-25-ZK	34	M 6	25	16	4	3.5	4.5	21	10.5	1	1.3	5.1	18
GN 7336.5-34-M6-30-ZK	34	M 6	30	16	4	3.5	4.5	21	10.5	1	1.3	5.1	18
GN 7336.5-42-M8-20-ZK	42	M 8	20	19	6	5	6.1	26	13	1.5	1.6	6.2	29
GN 7336.5-42-M8-25-ZK	42	M 8	25	19	6	5	6.1	26	13	1.5	1.6	6.2	31
GN 7336.5-42-M8-30-ZK	42	M 8	30	19	6	5	6.1	26	13	1.5	1.6	6.2	32
GN 7336.5-42-M8-40-ZK	42	M 8	40	19	6	5	6.1	26	13	1.5	1.6	6.2	36
GN 7336.5-53-M10-25-ZK	53	M 10	25	24	8	6.5	7.8	32	16	2	1.9	7.3	58
GN 7336.5-53-M10-30-ZK	53	M 10	30	24	8	6.5	7.8	32	16	2	1.9	7.3	60
GN 7336.5-53-M10-40-ZK	53	M 10	40	24	8	6.5	7.8	32	16	2	1.9	7.3	66
GN 7336.5-53-M10-50-ZK	53	M 10	50	24	8	6.5	7.8	32	16	2	1.9	7.3	71

