

## Control Handwheels

### Aluminum

#### SPECIFICATION

##### Types

- Type **A**: Without handle
- Type **D**: With revolving knob

##### Bore codes

- Version **B**: Without keyway
- Version **K**: With keyway DIN 6885-1 P9
- Version **Z**: With collet

##### Wheel body

Aluminum  
Anodized, black

##### Cover

Plastic, light gray

##### Collet / Hex nut

Brass

##### Grub screw DIN 916

Stainless steel  
with internal hex and serrated point

##### Revolving cylindrical knob

- Plastic, Polyamide (PA)
- Black, matte
  - Spindle  
Stainless steel AISI 303



#### ACCESSORY


- GN 184 Countersunk Washers (for Axial Fastening) (see page 971)
- GN 826 Clamping Elements (for Adjustable Spindles) (see page 960)

#### TECHNICAL INFORMATION

- Keyway P9 DIN 6885-1 (see page A16)
- ISO-Fundamental Tolerances (see page A21)
- Plastic Characteristics (see page A2)
- Stainless Steel Characteristics (see page A26)

#### INFORMATION

Control handwheels GN 736 are used for setting operations with low torque.  
Coarse setting is made by means of the cylindrical knob (fingertip grip) followed by fine setting using the knurled rim of the handwheel.

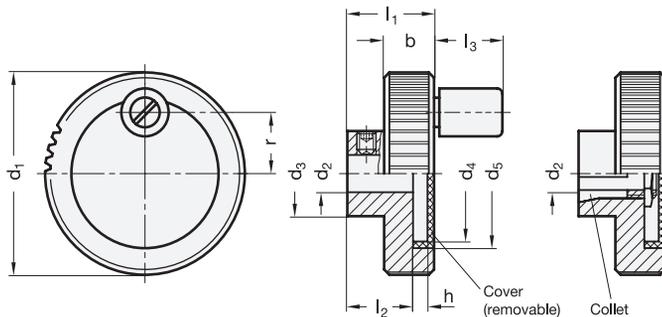

#### GN 736-A

Description	d <sub>1</sub>	d <sub>2</sub> H8 Bore	d <sub>3</sub>	d <sub>4</sub>	d <sub>5</sub>	b -0.5	h	l <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub> ≈	r	∅ cylindrical knob	⚖
GN 736-52-B10-A	52	10	22	37	39.5	13	3.8	23	17	19	15.5	13	56
GN 736-52-K10-A	52	10	22	37	39.5	13	3.8	23	17	19	15.5	13	59
GN 736-52-Z10-A	52	10	22	37	39.5	13	3.8	23	17	19	15.5	13	65
GN 736-62-B10-A	62	10	25	47	49.5	13	3.8	23	17	21	20.5	14	76
GN 736-62-K10-A	62	10	25	47	49.5	13	3.8	23	17	21	20.5	14	82
GN 736-62-Z10-A	62	10	25	47	49.5	13	3.8	23	17	21	20.5	14	100

#### GN 736-D

Description	d <sub>1</sub>	d <sub>2</sub> H8 Bore	d <sub>3</sub>	d <sub>4</sub>	d <sub>5</sub>	b -0.5	h	l <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub> ≈	r	∅ cylindrical knob	⚖
GN 736-52-B10-D	52	10	22	37	39.5	13	3.8	23	17	19	15.5	13	69
GN 736-52-K10-D	52	10	22	37	39.5	13	3.8	23	17	19	15.5	13	80
GN 736-52-Z10-D	52	10	22	37	39.5	13	3.8	23	17	19	15.5	13	77
GN 736-62-B10-D	62	10	25	47	49.5	13	3.8	23	17	21	20.5	14	90
GN 736-62-K10-D	62	10	25	47	49.5	13	3.8	23	17	21	20.5	14	94
GN 736-62-Z10-D	62	10	25	47	49.5	13	3.8	23	17	21	20.5	14	50

