

## Handwheels

### Cast Iron, with Large Hub

#### SPECIFICATION

##### Bore codes

- Version **B**: Without keyway
- Version **K**: With keyway DIN 6885-1 P9

##### Types

- Type **A**: Without handle
- Type **D**: With revolving handle

##### Cast iron GG

- Hub machined
- Rim turned and polished  
Concentricity and axial runout deviation < 0.4
- Handles DIN 39 (see page 565) / DIN 98 (see page 579)  
Steel, zinc plated, blue passivated



#### INFORMATION

Going beyond the DIN standard, handwheels GN 950.1 are also available with  $\varnothing d_1 = 180$  and in types F and D with fixed or revolving handle.


Handwheels GN 950.1 have extended hubs with larger diameters, allowing for larger bores and an increased distance between the wheel rim and the fastening surface.

#### ACCESSORY

- GN 184 Countersunk Washers (for Axial Fixing) (see page 871)

#### TECHNICAL INFORMATION

- Keyway P9 DIN 6885-1 (see page A16)
- ISO-Fundamental Tolerances (see page A21)
- Cross Holes GN 110 (see page A17)

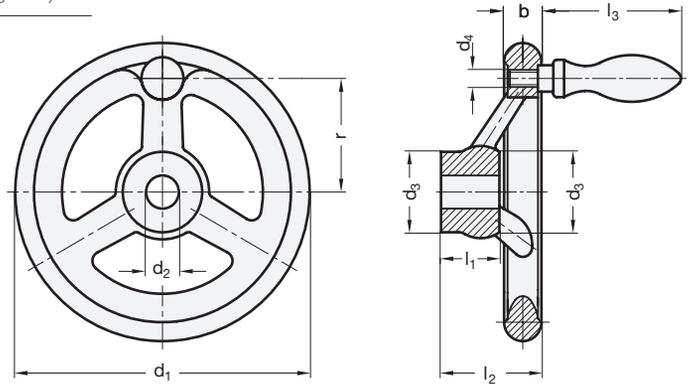

#### GN 950.1-B

Description	$d_1$	$d_2$ H7 Bore	b	$d_3 \approx$	$d_4$	$l_1$	$l_2 \approx$	$l_3 \approx$	r	Ø Handle	No. of spokes	⚖
GN 950.1-GG-125-B14-A	125	14	16	34	-	26	45	65	-	-	3	750
GN 950.1-GG-125-B14-D	125	14	16	34	M 8	26	45	65	47	20	3	886
GN 950.1-GG-160-B16-A	160	16	18	45	-	32	52	80	-	-	3	1300
GN 950.1-GG-160-B16-D	160	16	18	45	M 10	32	52	80	62	25	3	1487
GN 950.1-GG-200-B20-A	200	20	22	50	-	38	59	80	-	-	3	2320
GN 950.1-GG-200-B20-D	200	20	22	50	M 10	38	59	80	80	25	3	2515
GN 950.1-GG-250-B24-A	250	24	26	56	-	44	66	102	-	-	5	4000
GN 950.1-GG-250-B24-D	250	24	26	56	M 12	44	66	102	101	32	5	4400

#### GN 950.1-K

Description	$d_1$	$d_2$ H7 Bore	b	$d_3 \approx$	$d_4$	$l_1$	$l_2 \approx$	$l_3 \approx$	r	Ø Handle	No. of spokes	⚖
GN 950.1-GG-125-K14-A	125	14	16	34	-	26	45	65	-	-	3	806
GN 950.1-GG-125-K14-D	125	14	16	34	M 8	26	45	65	47	20	3	882
GN 950.1-GG-160-K16-A	160	16	18	45	-	32	52	80	-	-	3	1320
GN 950.1-GG-160-K16-D	160	16	18	45	M 10	32	52	80	62	25	3	1500
GN 950.1-GG-200-K20-A	200	20	22	50	-	38	59	80	-	-	3	2329
GN 950.1-GG-200-K20-D	200	20	22	50	M 10	38	59	80	80	25	3	2500
GN 950.1-GG-250-K24-A	250	24	26	56	-	44	66	102	-	-	5	4000
GN 950.1-GG-250-K24-D	250	24	26	56	M 12	44	66	102	101	32	5	4460