

Bull's Eye Spirit Levels

Housing Aluminum, for Surface Mounting

SPECIFICATION

Sensitivity

- 30 Angle minutes, bubble move by 2 mm

Types

- Type **A**: With smooth reference surface
- Type **B**: With mounting thread

Housing

Aluminum

- Anodized, natural color **ALN**
- Anodized, black **ALS**

Spirit level element

- Glass plastic body
- Filling
Colorless-transparent **K**

Casting compound

Mineral-based

INFORMATION

Bull's eye spirit levels GN 2279 are used to check the horizontal position of jigs, machines, devices, appliances and instruments.

Type A is used if the spirit level is to be used as a tool, e.g. at different measuring points.


The spirit levels are aligned in relation to the reference or contact surface, such that the bubble is located inside the marking ring once the horizontal position of the contact surface is reached.

ON REQUEST

- Filling, green-transparent
- Other sensitivities
- Housing in brass or stainless steel

TECHNICAL INFORMATION

- General Information on Bull's Eye, Screw-On and Cross Spirit Levels (see page 678)

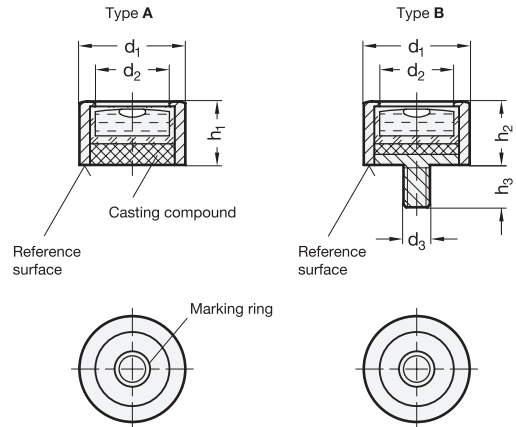

GN 2279-A

Description	d ₁	d ₂	d ₃	h ₁	h ₂	h ₃	△
GN 2279-ALN-14-K-30-A	14	10	M 4	9.5	7.7	5	2
GN 2279-ALN-20-K-30-A	20	14	M 5	13	13	6	4
GN 2279-ALN-30-K-30-A	30	21	M 6	15	15	7.5	7
GN 2279-ALS-14-K-30-A	14	10	M 4	9.5	7.7	5	2
GN 2279-ALS-20-K-30-A	20	14	M 5	13	13	6	4
GN 2279-ALS-30-K-30-A	30	21	M 6	15	15	7.5	7

GN 2279-B

Description	d ₁	d ₂	d ₃	h ₁	h ₂	h ₃	△
GN 2279-ALN-14-K-30-B	14	10	M 4	9.5	7.7	5	2
GN 2279-ALN-20-K-30-B	20	14	M 5	13	13	6	4
GN 2279-ALN-30-K-30-B	30	21	M 6	15	15	7.5	14
GN 2279-ALS-14-K-30-B	14	10	M 4	9.5	7.7	5	2
GN 2279-ALS-20-K-30-B	20	14	M 5	13	13	6	4
GN 2279-ALS-30-K-30-B	30	21	M 6	15	15	7.5	14