

Screw-On Spirit Levels

Housing Brass, for Mounting with Screws

SPECIFICATION

Sensitivity

- **6** Angle minutes, bubble move by 2 mm
- **50** Angle minutes, bubble move by 2 mm

Identification no.

- No. **1**: Viewing window top
- No. **2**: Viewing window top - front
- No. **3**: Viewing window top - front - back

Housing

Brass

Powder coated

- Black, RAL 9005, textured finish **MSW**
- Silver, RAL 9006, textured finish **MSR**

Spirit level element

- Glass plastic body
- Filling
 - Green-transparent **G**

Casting compound

Mineral-based




ON REQUEST

- Filling, colorless-transparent
- Other sensitivities
- Other colors

INFORMATION

Screw-on spirit levels GN 2282 are used to check the horizontal position of jigs, machines, devices, appliances and instruments.

The spirit levels are aligned in relation to the finished reference surface so that the bubble is centered in the middle of the marking lines once the horizontal position of the contact surface in the longitudinal direction is reached.

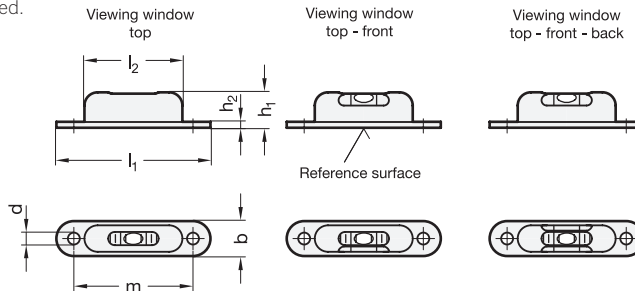

TECHNICAL INFORMATION

- General Information on Bull's Eye, Screw-On and Cross Spirit Levels (see page 678)

GN 2282-MSW-6

Description	l ₁	b	d	h ₁	h ₂	l ₂	m	⚖
GN 2282-MSW-57-G-6-1	57	12	4,5	13	1	37	45	13
GN 2282-MSW-57-G-6-2	57	12	4,5	13	1	37	45	12
GN 2282-MSW-57-G-6-3	57	12	4,5	13	1	37	45	12

GN 2282-MSW-50

Description	l ₁	b	d	h ₁	h ₂	l ₂	m	⚖
GN 2282-MSW-57-G-50-1	57	12	4,5	13	1	37	45	15
GN 2282-MSW-57-G-50-2	57	12	4,5	13	1	37	45	12
GN 2282-MSW-57-G-50-3	57	12	4,5	13	1	37	45	12

GN 2282-MSR-6

Description	l ₁	b	d	h ₁	h ₂	l ₂	m	⚖
GN 2282-MSR-57-G-6-1	57	12	4,5	13	1	37	45	13
GN 2282-MSR-57-G-6-2	57	12	4,5	13	1	37	45	12
GN 2282-MSR-57-G-6-3	57	12	4,5	13	1	37	45	12

GN 2282-MSR-50

Description	l ₁	b	d	h ₁	h ₂	l ₂	m	⚖
GN 2282-MSR-57-G-50-1	57	12	4,5	13	1	37	45	15
GN 2282-MSR-57-G-50-2	57	12	4,5	13	1	37	45	12
GN 2282-MSR-57-G-50-3	57	12	4,5	13	1	37	45	12