

Adjustable Hand Levers

**Zinc Die Casting, Insert Steel / Stainless Steel,
with External Thread, with Special Tip**

SPECIFICATION

Insert Steel

Types

- Type **MS**: Brass tip
- Type **KU**: Plastic tip
- Type **DZ**: Hardened tip
- Type **ZK**: Spherical end
- Type **KD**: Spherical end with thrust pad POM
- Type **RD**: Spherical end with thrust pad NBR
- Type **KS**: Conical end hardened

Handle

Zinc die casting

Powder coated

- Black, RAL 9005, textured finish **B**
- Orange, RAL 2004, textured finish **O**
Only type MS / KU / DZ / ZK / KD
- Red, RAL 3000, textured finish **R**
- Silver, RAL 9006, textured finish **S**
Only type MS / KU / DZ / ZK / KD

Insert / Retaining screw

Steel, blackened

- Property class 5.8
- Conical tip hardened for type KS

Tip

- Brass for type MS
- Plastic, Polyacetal (POM) for type KU
- Steel, hardened (oval point) for type DZ

Thrust pad

- Plastic, Polyacetal (POM) for type KD
 - Operating temperature up to 80 °C
 - Black, matte finish
- Acrylonitrile butadiene rubber (NBR) for type RD
 - Hardness 85 ±5 Shore A
 - Operating temperature up to 120 °C
 - Black, matte finish
 - Disk stainless steel AISI 304

Insert Stainless Steel

Types

- Type **MSN**: Brass tip
- Type **KUN**: Plastic tip
- Type **ZKN**: Spherical end
- Type **KDN**: Spherical end with thrust pad POM
- Type **NDN**: Spherical end with thrust pad stainless steel
- Type **RDN**: Spherical end with thrust pad NBR

Handle

Zinc die casting

Powder coated

- Black, RAL 9005, textured finish **B**
- Red, RAL 3000, textured finish **R**

Insert / Retaining screw

Stainless steel AISI 303

Tip

- Brass for type MSN
- Plastic, Polyacetal (POM) for type KUN

Thrust pad

- Plastic, Polyacetal (POM) for type KD
- Operating temperature up to 80 °C
- Black, matte finish



- Stainless steel AISI 303 for type NDN
 - O-ring
 - Fluorine rubber (FKM)
 - Operating temperature up to 200 °C
- Acrylonitrile butadiene rubber (NBR) for type RDN
 - Hardness 85 ±5 Shore A
 - Operating temperature up to 120 °C
 - Black, matte finish
 - Disk stainless steel AISI 304

INFORMATION

Adjustable hand levers GN 306 are used in devices for tool-free clamping, pressing or fixation. To achieve a convenient clamping position, the handle can be lifted by the dimension h_4 and then swiveled. Upon releasing, it snaps back into the serration under spring pressure.

The tip of types MS / KU / MSN / KUN helps prevent pressure marks or damage to the clamped workpiece. The conical end of type KS allows for simple positioning or centering in a corresponding mounting hole. The rounded tip of type DZ provides a pointed contact and angular compensation.

The thrust pad of types KD / RD / KDN / RDN enlarges the contact surface to protect surfaces from damage. In combination with the spherical end, the thrust pad forms a ball joint that adapts to uneven clamping surfaces. It also prevents the rotational movement from being transferred to the clamping surface during clamping.

The rubber coating of types RD / RDN also prevents slipping, provides a dampening effect and reduces noise. In this version, the disk is encased in vulcanized rubber to ensure high load capacity and dimensional stability.


The thrust pads are removable and are supplied unattached.

ON REQUEST

- Handle in other colors
- Flat handle GN 302 (see page 360) (Insert Steel)
- Handle in stainless steel (Insert Stainless Steel)

TECHNICAL INFORMATION

- Strength Values of Screws (see page A20)
- Plastic Characteristics (see page A2)
- Stainless Steel Characteristics (see page A26)

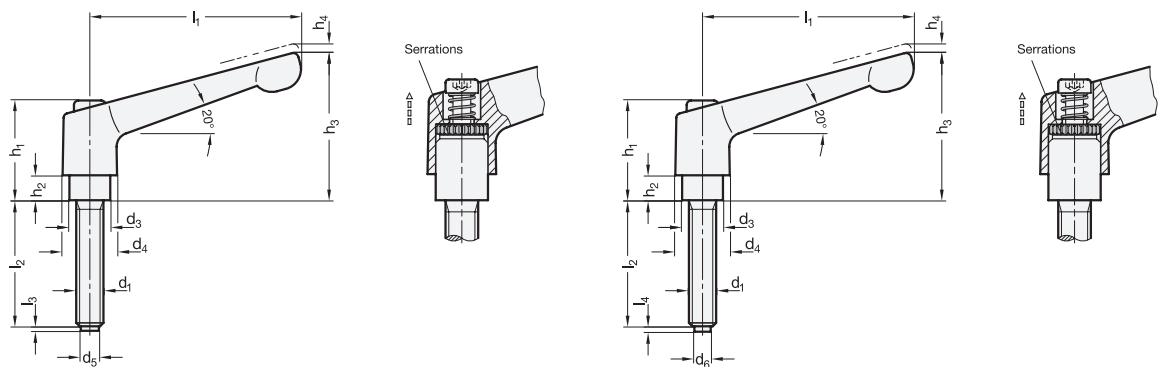

* Complete with

 B	 O	 R	 S
RAL9005	RAL2004	RAL3000	RAL9006

GN 306-M5

Description	l1	d1	l2	d3	d4	d5	h1	h2	h3	h4 Stroke	l3	
GN 306-30-M6-16-MS-*	30	M 6	16	10	13	4	24.5	4	31	3.5	1	33
GN 306-30-M6-20-MS-*	30	M 6	20	10	13	4	24.5	4	31	3.5	1	33
GN 306-30-M6-25-MS-*	30	M 6	25	10	13	4	24.5	4	31	3.5	1	34
GN 306-30-M6-32-MS-*	30	M 6	32	10	13	4	24.5	4	31	3.5	1	35
GN 306-30-M6-40-MS-*	30	M 6	40	10	13	4	24.5	4	31	3.5	1	37
GN 306-30-M6-50-MS-*	30	M 6	50	10	13	4	24.5	4	31	3.5	1	38
GN 306-45-M6-16-MS-*	45	M 6	16	10	13	4	24.5	4	35	3.5	1	37
GN 306-45-M6-20-MS-*	45	M 6	20	10	13	4	24.5	4	35	3.5	1	37
GN 306-45-M6-25-MS-*	45	M 6	25	10	13	4	24.5	4	35	3.5	1	38
GN 306-45-M6-32-MS-*	45	M 6	32	10	13	4	24.5	4	35	3.5	1	39
GN 306-45-M6-40-MS-*	45	M 6	40	10	13	4	24.5	4	35	3.5	1	41
GN 306-45-M6-50-MS-*	45	M 6	50	10	13	4	24.5	4	35	3.5	1	42
GN 306-63-M8-20-MS-*	63	M 8	20	13.5	17.5	6	31	6.5	45	4	1.5	80
GN 306-63-M8-25-MS-*	63	M 8	25	13.5	17.5	6	31	6.5	45	4	1.5	81
GN 306-63-M8-32-MS-*	63	M 8	32	13.5	17.5	6	31	6.5	45	4	1.5	83
GN 306-63-M8-40-MS-*	63	M 8	40	13.5	17.5	6	31	6.5	45	4	1.5	86
GN 306-63-M8-50-MS-*	63	M 8	50	13.5	17.5	6	31	6.5	45	4	1.5	90
GN 306-63-M8-63-MS-*	63	M 8	63	13.5	17.5	6	31	6.5	45	4	1.5	92
GN 306-63-M10-20-MS-*	63	M 10	20	13.5	17.5	8	31	6.5	45	4	2	84
GN 306-63-M10-25-MS-*	63	M 10	25	13.5	17.5	8	31	6.5	45	4	2	86
GN 306-63-M10-32-MS-*	63	M 10	32	13.5	17.5	8	31	6.5	45	4	2	90
GN 306-63-M10-40-MS-*	63	M 10	40	13.5	17.5	8	31	6.5	45	4	2	93
GN 306-63-M10-50-MS-*	63	M 10	50	13.5	17.5	8	31	6.5	45	4	2	98
GN 306-63-M10-63-MS-*	63	M 10	63	13.5	17.5	8	31	6.5	45	4	2	105

Weight B





GN 306-KU

Description	l1	d1	l2	d3	d4	d6	h1	h2	h3	h4 Stroke	l4	
GN 306-30-M6-16-KU-*	30	M 6	16	10	13	3.5	24.5	4	31	3.5	1.3	32
GN 306-30-M6-20-KU-*	30	M 6	20	10	13	3.5	24.5	4	31	3.5	1.3	33
GN 306-30-M6-25-KU-*	30	M 6	25	10	13	3.5	24.5	4	31	3.5	1.3	34
GN 306-30-M6-32-KU-*	30	M 6	32	10	13	3.5	24.5	4	31	3.5	1.3	35
GN 306-30-M6-40-KU-*	30	M 6	40	10	13	3.5	24.5	4	31	3.5	1.3	36
GN 306-30-M6-50-KU-*	30	M 6	50	10	13	3.5	24.5	4	31	3.5	1.3	38
GN 306-45-M6-16-KU-*	45	M 6	16	10	13	3.5	24.5	4	35	3.5	1.3	36
GN 306-45-M6-20-KU-*	45	M 6	20	10	13	3.5	24.5	4	35	3.5	1.3	37
GN 306-45-M6-25-KU-*	45	M 6	25	10	13	3.5	24.5	4	35	3.5	1.3	38
GN 306-45-M6-32-KU-*	45	M 6	32	10	13	3.5	24.5	4	35	3.5	1.3	39
GN 306-45-M6-40-KU-*	45	M 6	40	10	13	3.5	24.5	4	35	3.5	1.3	40
GN 306-45-M6-50-KU-*	45	M 6	50	10	13	3.5	24.5	4	35	3.5	1.3	42
GN 306-63-M8-20-KU-*	63	M 8	20	13.5	17.5	5	31	6.5	45	4	1.6	79
GN 306-63-M8-25-KU-*	63	M 8	25	13.5	17.5	5	31	6.5	45	4	1.6	82
GN 306-63-M8-32-KU-*	63	M 8	32	13.5	17.5	5	31	6.5	45	4	1.6	83
GN 306-63-M8-40-KU-*	63	M 8	40	13.5	17.5	5	31	6.5	45	4	1.6	85
GN 306-63-M8-50-KU-*	63	M 8	50	13.5	17.5	5	31	6.5	45	4	1.6	88
GN 306-63-M8-63-KU-*	63	M 8	63	13.5	17.5	5	31	6.5	45	4	1.6	92
GN 306-63-M10-20-KU-*	63	M 10	20	13.5	17.5	6.5	31	6.5	45	4	1.9	82
GN 306-63-M10-25-KU-*	63	M 10	25	13.5	17.5	6.5	31	6.5	45	4	1.9	84
GN 306-63-M10-32-KU-*	63	M 10	32	13.5	17.5	6.5	31	6.5	45	4	1.9	88
GN 306-63-M10-40-KU-*	63	M 10	40	13.5	17.5	6.5	31	6.5	45	4	1.9	91
GN 306-63-M10-50-KU-*	63	M 10	50	13.5	17.5	6.5	31	6.5	45	4	1.9	86
GN 306-63-M10-63-KU-*	63	M 10	63	13.5	17.5	6.5	31	6.5	45	4	1.9	103

Weight B



Clamping levers

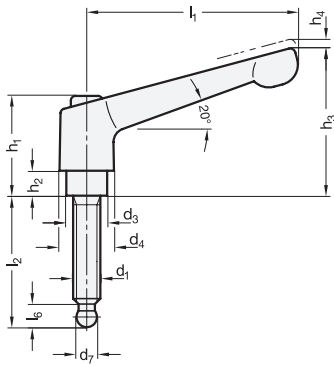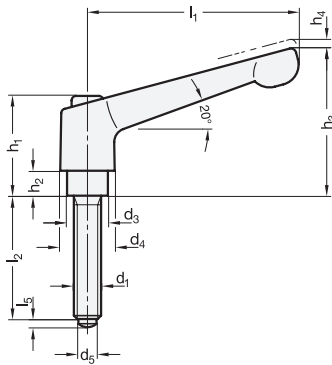

* Complete with
RAL9005 B RAL2004 O RAL3000 R RAL9006 S

GN 306-DZ


Description	l1	d1	l2	d3	d4	d5	h1	h2	h3	h4 Stroke	l5	
GN 306-30-M6-16-DZ.*	30	M 6	16	10	13	4	24.5	4	31	3.5	1.8	33
GN 306-30-M6-20-DZ.*	30	M 6	20	10	13	4	24.5	4	31	3.5	1.8	33
GN 306-30-M6-25-DZ.*	30	M 6	25	10	13	4	24.5	4	31	3.5	1.8	34
GN 306-30-M6-32-DZ.*	30	M 6	32	10	13	4	24.5	4	31	3.5	1.8	35
GN 306-30-M6-40-DZ.*	30	M 6	40	10	13	4	24.5	4	31	3.5	1.8	37
GN 306-30-M6-50-DZ.*	30	M 6	50	10	13	4	24.5	4	31	3.5	1.8	38
GN 306-45-M6-16-DZ.*	45	M 6	16	10	13	4	24.5	4	35	3.5	1.8	37
GN 306-45-M6-20-DZ.*	45	M 6	20	10	13	4	24.5	4	35	3.5	1.8	37
GN 306-45-M6-25-DZ.*	45	M 6	25	10	13	4	24.5	4	35	3.5	1.8	38
GN 306-45-M6-32-DZ.*	45	M 6	32	10	13	4	24.5	4	35	3.5	1.8	39
GN 306-45-M6-40-DZ.*	45	M 6	40	10	13	4	24.5	4	35	3.5	1.8	41
GN 306-45-M6-50-DZ.*	45	M 6	50	10	13	4	24.5	4	35	3.5	1.8	42
GN 306-63-M8-20-DZ.*	63	M 8	20	13.5	17.5	6	31	6.5	45	4	2.5	80
GN 306-63-M8-25-DZ.*	63	M 8	25	13.5	17.5	6	31	6.5	45	4	2.5	81
GN 306-63-M8-32-DZ.*	63	M 8	32	13.5	17.5	6	31	6.5	45	4	2.5	83
GN 306-63-M8-40-DZ.*	63	M 8	40	13.5	17.5	6	31	6.5	45	4	2.5	86
GN 306-63-M8-50-DZ.*	63	M 8	50	13.5	17.5	6	31	6.5	45	4	2.5	89
GN 306-63-M8-63-DZ.*	63	M 8	63	13.5	17.5	6	31	6.5	45	4	2.5	93
GN 306-63-M10-20-DZ.*	63	M 10	20	13.5	17.5	8	31	6.5	45	4	3.5	84
GN 306-63-M10-25-DZ.*	63	M 10	25	13.5	17.5	8	31	6.5	45	4	3.5	86
GN 306-63-M10-32-DZ.*	63	M 10	32	13.5	17.5	8	31	6.5	45	4	3.5	90
GN 306-63-M10-40-DZ.*	63	M 10	40	13.5	17.5	8	31	6.5	45	4	3.5	94
GN 306-63-M10-50-DZ.*	63	M 10	50	13.5	17.5	8	31	6.5	45	4	3.5	98
GN 306-63-M10-63-DZ.*	63	M 10	63	13.5	17.5	8	31	6.5	45	4	3.5	105

Weight B

GN 306-ZK

Description	l1	d1	l2	d3	d4	d7 +0.05	h1	h2	h3	h4 Stroke	l6	
GN 306-30-M6-16-ZK.*	30	M 6	16	10	13	4.5	24.5	4	31	3.5	5.1	32
GN 306-30-M6-20-ZK.*	30	M 6	20	10	13	4.5	24.5	4	31	3.5	5.1	33
GN 306-30-M6-25-ZK.*	30	M 6	25	10	13	4.5	24.5	4	31	3.5	5.1	34
GN 306-30-M6-32-ZK.*	30	M 6	32	10	13	4.5	24.5	4	31	3.5	5.1	35
GN 306-30-M6-40-ZK.*	30	M 6	40	10	13	4.5	24.5	4	31	3.5	5.1	36
GN 306-30-M6-50-ZK.*	30	M 6	50	10	13	4.5	24.5	4	31	3.5	5.1	38
GN 306-45-M6-16-ZK.*	45	M 6	16	10	13	4.5	24.5	4	35	3.5	5.1	36
GN 306-45-M6-20-ZK.*	45	M 6	20	10	13	4.5	24.5	4	35	3.5	5.1	37
GN 306-45-M6-25-ZK.*	45	M 6	25	10	13	4.5	24.5	4	35	3.5	5.1	38
GN 306-45-M6-32-ZK.*	45	M 6	32	10	13	4.5	24.5	4	35	3.5	5.1	39
GN 306-45-M6-40-ZK.*	45	M 6	40	10	13	4.5	24.5	4	35	3.5	5.1	40
GN 306-45-M6-50-ZK.*	45	M 6	50	10	13	4.5	24.5	4	35	3.5	5.1	42
GN 306-63-M8-20-ZK.*	63	M 8	20	13.5	17.5	6.1	31	6.5	45	4	6.2	79
GN 306-63-M8-25-ZK.*	63	M 8	25	13.5	17.5	6.1	31	6.5	45	4	6.2	80
GN 306-63-M8-32-ZK.*	63	M 8	32	13.5	17.5	6.1	31	6.5	45	4	6.2	82
GN 306-63-M8-40-ZK.*	63	M 8	40	13.5	17.5	6.1	31	6.5	45	4	6.2	85
GN 306-63-M8-50-ZK.*	63	M 8	50	13.5	17.5	6.1	31	6.5	45	4	6.2	88
GN 306-63-M8-63-ZK.*	63	M 8	63	13.5	17.5	6.1	31	6.5	45	4	6.2	92
GN 306-63-M10-20-ZK.*	63	M 10	20	13.5	17.5	7.8	31	6.5	45	4	7.3	82
GN 306-63-M10-25-ZK.*	63	M 10	25	13.5	17.5	7.8	31	6.5	45	4	7.3	84
GN 306-63-M10-32-ZK.*	63	M 10	32	13.5	17.5	7.8	31	6.5	45	4	7.3	88
GN 306-63-M10-40-ZK.*	63	M 10	40	13.5	17.5	7.8	31	6.5	45	4	7.3	92
GN 306-63-M10-50-ZK.*	63	M 10	50	13.5	17.5	7.8	31	6.5	45	4	7.3	96
GN 306-63-M10-63-ZK.*	63	M 10	63	13.5	17.5	7.8	31	6.5	45	4	7.3	103

Weight B

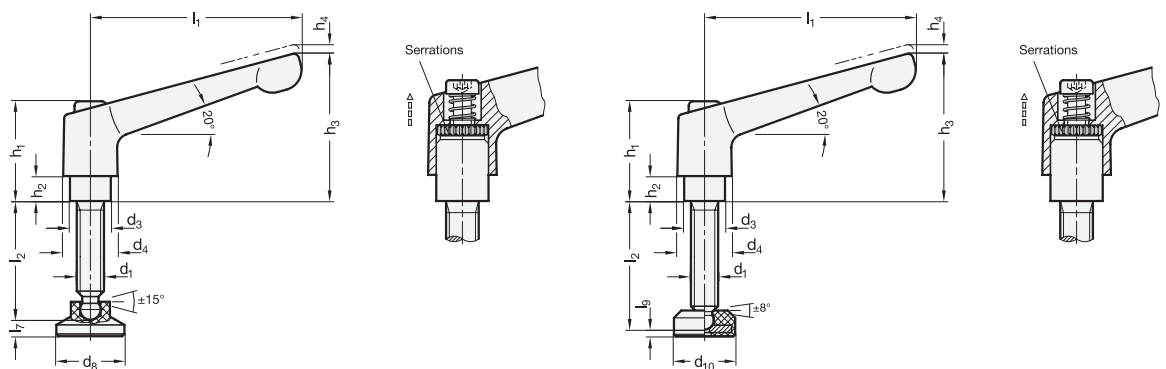

* Complete with

B

O

R

S

RAL9005

RAL2004

RAL3000

RAL9006

* Complete with

B

R

RAL9005

RAL3000

GN 306-KD



Description	l1	d1	l2	d3	d4	d8	h1	h2	h3	h4 Stroke	l7	⚖
GN 306-30-M6-16-KD-*	30	M 6	16	10	13	15	24.5	4	31	3.5	3.6	33
GN 306-30-M6-20-KD-*	30	M 6	20	10	13	15	24.5	4	31	3.5	3.6	34
GN 306-30-M6-25-KD-*	30	M 6	25	10	13	15	24.5	4	31	3.5	3.6	35
GN 306-30-M6-32-KD-*	30	M 6	32	10	13	15	24.5	4	31	3.5	3.6	36
GN 306-30-M6-40-KD-*	30	M 6	40	10	13	15	24.5	4	31	3.5	3.6	37
GN 306-30-M6-50-KD-*	30	M 6	50	10	13	15	24.5	4	31	3.5	3.6	39
GN 306-45-M6-16-KD-*	45	M 6	16	10	13	15	24.5	4	35	3.5	3.6	37
GN 306-45-M6-20-KD-*	45	M 6	20	10	13	15	24.5	4	35	3.5	3.6	38
GN 306-45-M6-25-KD-*	45	M 6	25	10	13	15	24.5	4	35	3.5	3.6	39
GN 306-45-M6-32-KD-*	45	M 6	32	10	13	15	24.5	4	35	3.5	3.6	40
GN 306-45-M6-40-KD-*	45	M 6	40	10	13	15	24.5	4	35	3.5	3.6	41
GN 306-45-M6-50-KD-*	45	M 6	50	10	13	15	24.5	4	35	3.5	3.6	43
GN 306-63-M8-20-KD-*	63	M 8	20	13.5	17.5	18	31	6.5	45	4	4.2	80
GN 306-63-M8-25-KD-*	63	M 8	25	13.5	17.5	18	31	6.5	45	4	4.2	82
GN 306-63-M8-32-KD-*	63	M 8	32	13.5	17.5	18	31	6.5	45	4	4.2	84
GN 306-63-M8-40-KD-*	63	M 8	40	13.5	17.5	18	31	6.5	45	4	4.2	87
GN 306-63-M8-50-KD-*	63	M 8	50	13.5	17.5	18	31	6.5	45	4	4.2	90
GN 306-63-M8-63-KD-*	63	M 8	63	13.5	17.5	18	31	6.5	45	4	4.2	94
GN 306-63-M10-20-KD-*	63	M 10	20	13.5	17.5	21	31	6.5	45	4	4.3	85
GN 306-63-M10-25-KD-*	63	M 10	25	13.5	17.5	21	31	6.5	45	4	4.3	87
GN 306-63-M10-32-KD-*	63	M 10	32	13.5	17.5	21	31	6.5	45	4	4.3	90
GN 306-63-M10-40-KD-*	63	M 10	40	13.5	17.5	21	31	6.5	45	4	4.3	95
GN 306-63-M10-50-KD-*	63	M 10	50	13.5	17.5	21	31	6.5	45	4	4.3	99
GN 306-63-M10-63-KD-*	63	M 10	63	13.5	17.5	21	31	6.5	45	4	4.3	106

Weight B

GN 306-RD

Description	l1	d1	l2	d3	d4	d10	h1	h2	h3	h4 Stroke	l9	⚖
GN 306-30-M6-16-RD-*	30	M 6	16	10	13	14	24.5	4	31	3.5	1.9	45
GN 306-30-M6-20-RD-*	30	M 6	20	10	13	14	24.5	4	31	3.5	1.9	33
GN 306-30-M6-25-RD-*	30	M 6	25	10	13	14	24.5	4	31	3.5	1.9	34
GN 306-30-M6-32-RD-*	30	M 6	32	10	13	14	24.5	4	31	3.5	1.9	36
GN 306-30-M6-40-RD-*	30	M 6	40	10	13	14	24.5	4	31	3.5	1.9	38
GN 306-30-M6-50-RD-*	30	M 6	50	10	13	14	24.5	4	31	3.5	1.9	40
GN 306-45-M6-16-RD-*	45	M 6	16	10	13	14	24.5	4	35	3.5	1.9	49
GN 306-45-M6-20-RD-*	45	M 6	20	10	13	14	24.5	4	35	3.5	1.9	38
GN 306-45-M6-25-RD-*	45	M 6	25	10	13	14	24.5	4	35	3.5	1.9	39
GN 306-45-M6-32-RD-*	45	M 6	32	10	13	14	24.5	4	35	3.5	1.9	41
GN 306-45-M6-40-RD-*	45	M 6	40	10	13	14	24.5	4	35	3.5	1.9	42
GN 306-45-M6-50-RD-*	45	M 6	50	10	13	14	24.5	4	35	3.5	1.9	45
GN 306-63-M8-20-RD-*	63	M 8	20	13.5	17.5	19	31	6.5	45	4	3.2	93
GN 306-63-M8-25-RD-*	63	M 8	25	13.5	17.5	19	31	6.5	45	4	3.2	95
GN 306-63-M8-32-RD-*	63	M 8	32	13.5	17.5	19	31	6.5	45	4	3.2	98
GN 306-63-M8-40-RD-*	63	M 8	40	13.5	17.5	19	31	6.5	45	4	3.2	101
GN 306-63-M8-50-RD-*	63	M 8	50	13.5	17.5	19	31	6.5	45	4	3.2	105
GN 306-63-M8-63-RD-*	63	M 8	63	13.5	17.5	19	31	6.5	45	4	3.2	110
GN 306-63-M10-20-RD-*	63	M 10	20	13.5	17.5	25	31	6.5	45	4	3	135
GN 306-63-M10-25-RD-*	63	M 10	25	13.5	17.5	25	31	6.5	45	4	3	106
GN 306-63-M10-32-RD-*	63	M 10	32	13.5	17.5	25	31	6.5	45	4	3	110
GN 306-63-M10-40-RD-*	63	M 10	40	13.5	17.5	25	31	6.5	45	4	3	115
GN 306-63-M10-50-RD-*	63	M 10	50	13.5	17.5	25	31	6.5	45	4	3	121
GN 306-63-M10-63-RD-*	63	M 10	63	13.5	17.5	25	31	6.5	45	4	3	129

Weight B

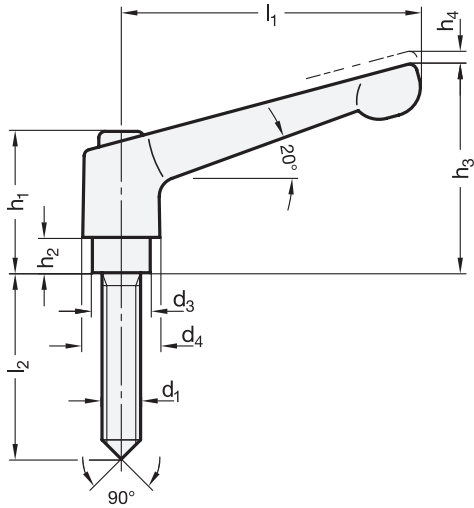


* Complete with
RAL9005 B RAL3000 R

GN 306-KS

Description	l ₁	d ₁	l ₂	d ₃	d ₄	h ₁	h ₂	h ₃	h ₄ Stroke	⚖
GN 306-30-M6-16-KS-*	30	M 6	16	10	13	24.5	4	31	3.5	30
GN 306-30-M6-20-KS-*	30	M 6	20	10	13	24.5	4	31	3.5	31
GN 306-30-M6-25-KS-*	30	M 6	25	10	13	24.5	4	31	3.5	32
GN 306-30-M6-32-KS-*	30	M 6	32	10	13	24.5	4	31	3.5	33
GN 306-30-M6-40-KS-*	30	M 6	40	10	13	24.5	4	31	3.5	35
GN 306-30-M6-50-KS-*	30	M 6	50	10	13	24.5	4	31	3.5	37
GN 306-45-M6-16-KS-*	45	M 6	16	10	13	24.5	4	35	3.5	37
GN 306-45-M6-20-KS-*	45	M 6	20	10	13	24.5	4	35	3.5	38
GN 306-45-M6-25-KS-*	45	M 6	25	10	13	24.5	4	35	3.5	39
GN 306-45-M6-32-KS-*	45	M 6	32	10	13	24.5	4	35	3.5	41
GN 306-45-M6-40-KS-*	45	M 6	40	10	13	24.5	4	35	3.5	43
GN 306-45-M6-50-KS-*	45	M 6	50	10	13	24.5	4	35	3.5	45
GN 306-63-M8-20-KS-*	63	M 8	20	13.5	17.5	31	6.5	45	4	87
GN 306-63-M8-25-KS-*	63	M 8	25	13.5	17.5	31	6.5	45	4	89
GN 306-63-M8-32-KS-*	63	M 8	32	13.5	17.5	31	6.5	45	4	91
GN 306-63-M8-40-KS-*	63	M 8	40	13.5	17.5	31	6.5	45	4	94
GN 306-63-M8-50-KS-*	63	M 8	50	13.5	17.5	31	6.5	45	4	98
GN 306-63-M8-63-KS-*	63	M 8	63	13.5	17.5	31	6.5	45	4	103
GN 306-63-M10-20-KS-*	63	M 10	20	13.5	17.5	31	6.5	45	4	90
GN 306-63-M10-25-KS-*	63	M 10	25	13.5	17.5	31	6.5	45	4	93
GN 306-63-M10-32-KS-*	63	M 10	32	13.5	17.5	31	6.5	45	4	97
GN 306-63-M10-40-KS-*	63	M 10	40	13.5	17.5	31	6.5	45	4	102
GN 306-63-M10-50-KS-*	63	M 10	50	13.5	17.5	31	6.5	45	4	108
GN 306-63-M10-63-KS-*	63	M 10	63	13.5	17.5	31	6.5	45	4	116


Weight B

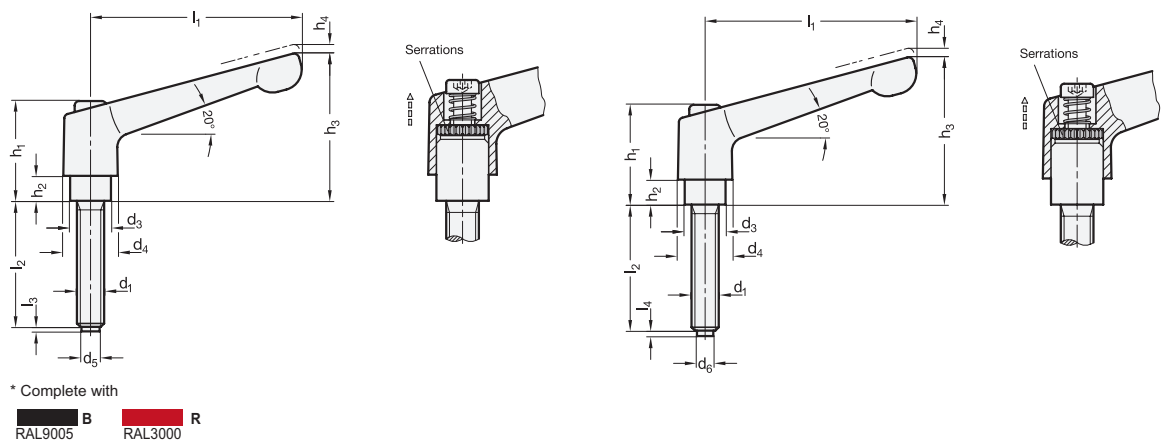

GN 306-MSN

Description	l1	d1	l2	d3	d4	d5	h1	h2	h3	h4 Stroke	l3	⚖
GN 306-30-M6-20-MSN-*	30	M 6	20	10	13	4	24,5	4	31	3,5	1	32
GN 306-30-M6-32-MSN-*	30	M 6	32	10	13	4	24,5	4	31	3,5	1	34
GN 306-30-M6-50-MSN-*	30	M 6	50	10	13	4	24,5	4	31	3,5	1	38
GN 306-45-M6-20-MSN-*	45	M 6	20	10	13	4	24,5	4	31	3,5	1	39
GN 306-45-M6-32-MSN-*	45	M 6	32	10	13	4	24,5	4	31	3,5	1	42
GN 306-45-M6-50-MSN-*	45	M 6	50	10	13	4	24,5	4	31	3,5	1	46
GN 306-63-M8-25-MSN-*	63	M 8	25	13,5	17,5	6	31	6,5	45	4	1,5	90
GN 306-63-M8-40-MSN-*	63	M 8	40	13,5	17,5	6	31	6,5	45	4	1,5	96
GN 306-63-M8-63-MSN-*	63	M 8	63	13,5	17,5	6	31	6,5	45	4	1,5	105
GN 306-63-M10-25-MSN-*	63	M 10	25	13,5	17,5	8	31	6,5	45	4	2	96
GN 306-63-M10-40-MSN-*	63	M 10	40	13,5	17,5	8	31	6,5	45	4	2	106
GN 306-63-M10-63-MSN-*	63	M 10	63	13,5	17,5	8	31	6,5	45	4	2	120

Weight B

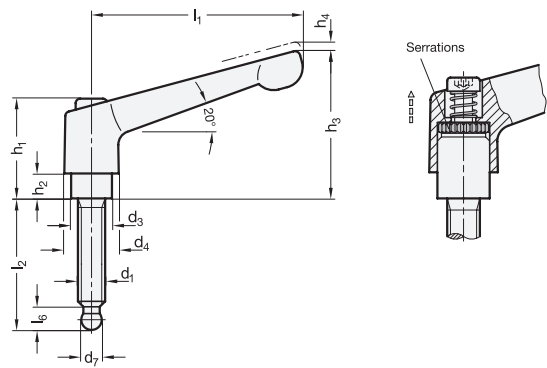

* Complete with

B RAL9005 **R** RAL3000

GN 306-ZKN


Description	l1	d1	l2	d3	d4	d7 +0,05	h1	h2	h3	h4 Stroke	l6	⚖
GN 306-30-M6-20-ZKN-*	30	M 6	20	10	13	4,5	24,5	4	31	3,5	5,1	31
GN 306-30-M6-32-ZKN-*	30	M 6	32	10	13	4,5	24,5	4	31	3,5	5,1	33
GN 306-30-M6-50-ZKN-*	30	M 6	50	10	13	4,5	24,5	4	31	3,5	5,1	37
GN 306-45-M6-20-ZKN-*	45	M 6	20	10	13	4,5	24,5	4	31	3,5	5,1	38
GN 306-45-M6-32-ZKN-*	45	M 6	32	10	13	4,5	24,5	4	31	3,5	5,1	41
GN 306-45-M6-50-ZKN-*	45	M 6	50	10	13	4,5	24,5	4	31	3,5	5,1	45
GN 306-63-M8-25-ZKN-*	63	M 8	25	13,5	17,5	6,1	31	6,5	45	4	6,2	88
GN 306-63-M8-40-ZKN-*	63	M 8	40	13,5	17,5	6,1	31	6,5	45	4	6,2	94
GN 306-63-M8-63-ZKN-*	63	M 8	63	13,5	17,5	6,1	31	6,5	45	4	6,2	104
GN 306-63-M10-25-ZKN-*	63	M 10	25	13,5	17,5	7,8	31	6,5	45	4	7,3	93
GN 306-63-M10-40-ZKN-*	63	M 10	40	13,5	17,5	7,8	31	6,5	45	4	7,3	102
GN 306-63-M10-63-ZKN-*	63	M 10	63	13,5	17,5	7,8	31	6,5	45	4	7,3	116

Weight B

GN 306-KUN

Description	l1	d1	l2	d3	d4	d6	h1	h2	h3	h4 Stroke	l4	⚖
GN 306-30-M6-20-KUN-*	30	M 6	20	10	13	3,5	24,5	4	31	3,5	1,3	31
GN 306-30-M6-32-KUN-*	30	M 6	32	10	13	3,5	24,5	4	31	3,5	1,3	34
GN 306-30-M6-50-KUN-*	30	M 6	50	10	13	3,5	24,5	4	31	3,5	1,3	38
GN 306-45-M6-20-KUN-*	45	M 6	20	10	13	3,5	24,5	4	31	3,5	1,3	39
GN 306-45-M6-32-KUN-*	45	M 6	32	10	13	3,5	24,5	4	31	3,5	1,3	41
GN 306-45-M6-50-KUN-*	45	M 6	50	10	13	3,5	24,5	4	31	3,5	1,3	45
GN 306-63-M8-25-KUN-*	63	M 8	25	13,5	17,5	5	31	6,5	45	4	1,6	89
GN 306-63-M8-40-KUN-*	63	M 8	40	13,5	17,5	5	31	6,5	45	4	1,6	95
GN 306-63-M8-63-KUN-*	63	M 8	63	13,5	17,5	5	31	6,5	45	4	1,6	105
GN 306-63-M10-25-KUN-*	63	M 10	25	13,5	17,5	6,5	31	6,5	45	4	1,9	94
GN 306-63-M10-40-KUN-*	63	M 10	40	13,5	17,5	6,5	31	6,5	45	4	1,9	104
GN 306-63-M10-63-KUN-*	63	M 10	63	13,5	17,5	6,5	31	6,5	45	4	1,9	118

Weight B

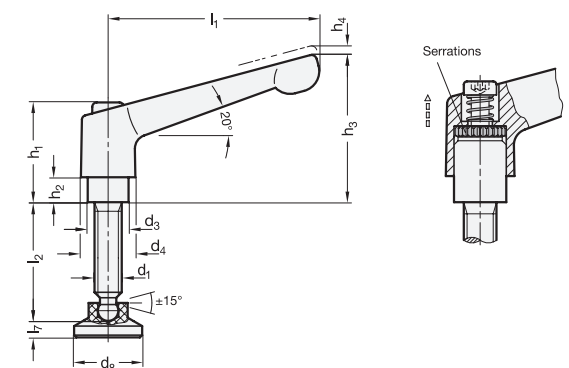





GN 306-KDN

Description	l1	d1	l2	d3	d4	d8	h1	h2	h3	h4 Stroke	l7	⚖
GN 306-30-M6-20-KDN-*	30	M 6	20	10	13	15	24,5	4	31	3,5	3,6	32
GN 306-30-M6-32-KDN-*	30	M 6	32	10	13	15	24,5	4	31	3,5	3,6	34
GN 306-30-M6-50-KDN-*	30	M 6	50	10	13	15	24,5	4	31	3,5	3,6	38
GN 306-45-M6-20-KDN-*	45	M 6	20	10	13	15	24,5	4	31	3,5	3,6	39
GN 306-45-M6-32-KDN-*	45	M 6	32	10	13	15	24,5	4	31	3,5	3,6	42
GN 306-45-M6-50-KDN-*	45	M 6	50	10	13	15	24,5	4	31	3,5	3,6	46
GN 306-63-M8-25-KDN-*	63	M 8	25	13,5	17,5	18	31	6,5	45	4	4,2	90
GN 306-63-M8-40-KDN-*	63	M 8	40	13,5	17,5	18	31	6,5	45	4	4,2	96
GN 306-63-M8-63-KDN-*	63	M 8	63	13,5	17,5	18	31	6,5	45	4	4,2	105
GN 306-63-M10-25-KDN-*	63	M 10	25	13,5	17,5	21	31	6,5	45	4	4,3	96
GN 306-63-M10-40-KDN-*	63	M 10	40	13,5	17,5	21	31	6,5	45	4	4,3	105
GN 306-63-M10-63-KDN-*	63	M 10	63	13,5	17,5	21	31	6,5	45	4	4,3	119

Weight B



3
Clamping levers

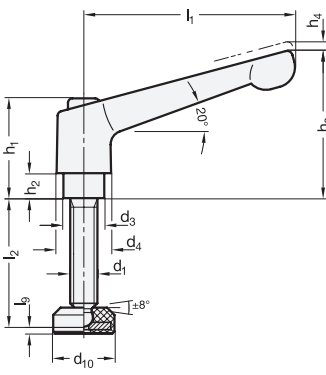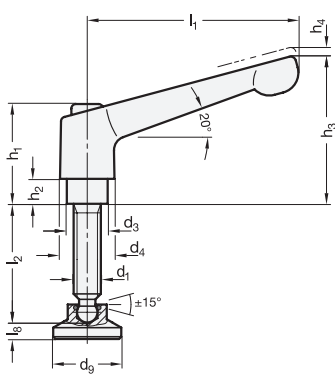

* Complete with
RAL9005 B RAL3000 R

GN 306-NDN

Description	l1	d1	l2	d3	d4	d9	h1	h2	h3	h4 Stroke	l8	
GN 306-30-M6-20-NDN-*	30	M 6	20	10	13	21	24.5	4	31	3.5	6	47
GN 306-30-M6-32-NDN-*	30	M 6	32	10	13	21	24.5	4	31	3.5	6	50
GN 306-30-M6-50-NDN-*	30	M 6	50	10	13	21	24.5	4	31	3.5	6	54
GN 306-45-M6-20-NDN-*	45	M 6	20	10	13	21	24.5	4	31	3.5	6	55
GN 306-45-M6-32-NDN-*	45	M 6	32	10	13	21	24.5	4	31	3.5	6	57
GN 306-45-M6-50-NDN-*	45	M 6	50	10	13	21	24.5	4	31	3.5	6	61
GN 306-63-M8-25-NDN-*	63	M 8	25	13.5	17.5	25	31	6.5	45	4	5.5	111
GN 306-63-M8-40-NDN-*	63	M 8	40	13.5	17.5	25	31	6.5	45	4	5.5	117
GN 306-63-M8-63-NDN-*	63	M 8	63	13.5	17.5	25	31	6.5	45	4	5.5	126
GN 306-63-M10-25-NDN-*	63	M 10	25	13.5	17.5	32	31	6.5	45	4	5	127
GN 306-63-M10-40-NDN-*	63	M 10	40	13.5	17.5	32	31	6.5	45	4	5	136
GN 306-63-M10-63-NDN-*	63	M 10	63	13.5	17.5	32	31	6.5	45	4	5	150

Weight B

GN 306-RDN

Description	l1	d1	l2	d3	d4	d10	h1	h2	h3	h4 Stroke	l9	
GN 306-30-M6-20-RDN-*	30	M 6	20	10	13	14	24.5	4	31	3.5	1.9	33
GN 306-30-M6-32-RDN-*	30	M 6	32	10	13	14	24.5	4	31	3.5	1.9	36
GN 306-30-M6-50-RDN-*	30	M 6	50	10	13	14	24.5	4	31	3.5	1.9	40
GN 306-45-M6-20-RDN-*	45	M 6	20	10	13	14	24.5	4	31	3.5	1.9	41
GN 306-45-M6-32-RDN-*	45	M 6	32	10	13	14	24.5	4	31	3.5	1.9	44
GN 306-45-M6-50-RDN-*	45	M 6	50	10	13	14	24.5	4	31	3.5	1.9	48
GN 306-63-M8-25-RDN-*	63	M 8	25	13.5	17.5	19	31	6.5	45	4	3.2	95
GN 306-63-M8-40-RDN-*	63	M 8	40	13.5	17.5	19	31	6.5	45	4	3.2	101
GN 306-63-M8-63-RDN-*	63	M 8	63	13.5	17.5	19	31	6.5	45	4	3.2	110
GN 306-63-M10-25-RDN-*	63	M 10	25	13.5	17.5	25	31	6.5	45	4	3	106
GN 306-63-M10-40-RDN-*	63	M 10	40	13.5	17.5	25	31	6.5	45	4	3	115
GN 306-63-M10-63-RDN-*	63	M 10	63	13.5	17.5	25	31	6.5	45	4	3	130

Weight B