

## Star Knobs

with Loss Protection

### SPECIFICATION

#### Types

- Type **A**: only with retaining ring
- Type **H**: with retaining cable
- Type **K**: with ball chain

Knob

Stainless Steel AISI 316L (A4)

Hub welded

matte, shot blasted

Threaded stud / Bushing

Stainless Steel AISI 304

Retaining ring GN 111.6 (see page 903)

Stainless Steel AISI 301

Ball chain GN 111.5 (see page 905) (Type K)

Stainless Steel AISI 301

Retaining cable GN 111.2 (see page 906) (Type H)

Stainless Steel

coated with clear plastic

### INFORMATION

Stainless Steel-Star knobs GN 5334.13 can be captive-attached to a base element with the help of a ball chain or a retaining cable.

The star knobs are supplied ready assembled (with retaining ring and ball chain or retaining cable).

Original Elesa design, now produced in metal in agreement with Elesa S.p.A.




### ON REQUEST

- Ball chains / Retaining cables with other lengths
- with spiral retaining cable GN 111.4 (see page 908)
- other GN / DIN standards with loss protection

### TECHNICAL INFORMATION

- Stainless Steel characteristics (see page A26)

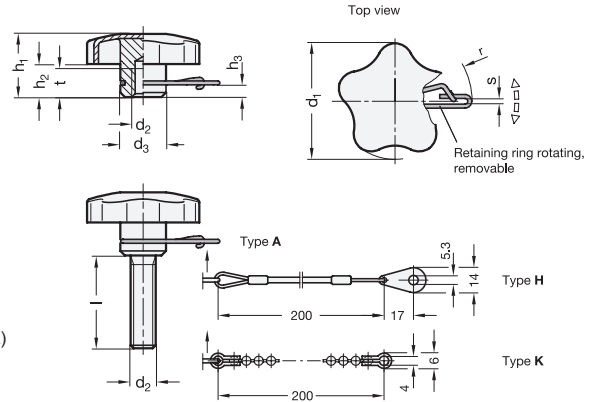

\* Complete with type index of the Stainless Steel-Star knobs (A, H or K)

| A                        | H                    | K               |
|--------------------------|----------------------|-----------------|
| only with retaining ring | with retaining cable | with ball chain |

### GN 5334.13

### STAINLESS STEEL

| Description            | d1 | d2   | l  | d3 | h1 | h2 | h3  | r ≈  | s   | t min. | △   |
|------------------------|----|------|----|----|----|----|-----|------|-----|--------|-----|
| GN 5334.13-40-M8-*     | 40 | M 8  | -  | 14 | 24 | 12 | 3.2 | 22.3 | 2.8 | 15     | 37  |
| GN 5334.13-50-M10-*    | 50 | M 10 | -  | 18 | 30 | 17 | 3.9 | 29.6 | 3.2 | 18     | 69  |
| GN 5334.13-60-M12-*    | 60 | M 12 | -  | 20 | 38 | 20 | 3.9 | 30.7 | 3.2 | 22     | 113 |
| GN 5334.13-40-M8-20-*  | 40 | M 8  | 20 | 14 | 24 | 12 | -   | 22.3 | 2.8 | -      | 50  |
| GN 5334.13-40-M8-30-*  | 40 | M 8  | 30 | 14 | 24 | 12 | -   | 22.3 | 2.8 | -      | 53  |
| GN 5334.13-40-M8-40-*  | 40 | M 8  | 40 | 14 | 24 | 12 | -   | 22.3 | 2.8 | -      | 56  |
| GN 5334.13-50-M10-20-* | 50 | M 10 | 20 | 18 | 30 | 17 | -   | 29.6 | 3.2 | -      | 92  |
| GN 5334.13-50-M10-30-* | 50 | M 10 | 30 | 18 | 30 | 17 | -   | 29.6 | 3.2 | -      | 97  |
| GN 5334.13-50-M10-40-* | 50 | M 10 | 40 | 18 | 30 | 17 | -   | 29.6 | 3.2 | -      | 102 |
| GN 5334.13-60-M12-20-* | 60 | M 12 | 20 | 20 | 38 | 20 | -   | 30.7 | 3.2 | -      | 148 |
| GN 5334.13-60-M12-30-* | 60 | M 12 | 30 | 20 | 38 | 20 | -   | 30.7 | 3.2 | -      | 156 |
| GN 5334.13-60-M12-40-* | 60 | M 12 | 40 | 20 | 38 | 20 | -   | 30.7 | 3.2 | -      | 163 |
| GN 5334.13-60-M12-50-* | 60 | M 12 | 50 | 20 | 38 | 20 | -   | 30.7 | 3.2 | -      | 171 |

Weight type A