

## Flanges

for Swivel Ball Joints GN 784, Stainless Steel

### SPECIFICATION

Stainless Steel AISI 304

matte, tumbled finish **MT**

Countersunk screw DIN 7991

Stainless Steel AISI 304

Half-length tapered groove pin DIN 8745

Stainless Steel AISI 304

### INFORMATION



The GN 784.1 flanges are mounted from below into the GN 784 swivel ball joints (see page 1160). A half-length tapered groove pin prevents any rotation.

The flange enables the swivel ball joints to be mounted on the upper surface. The d2 section with the three d3 drill holes is configured so that standard screws with washers can be used.

The half-length tapered groove pin is mounted on the flange. The countersunk screw is included separately.

### TECHNICAL INFORMATION

- Stainless Steel characteristics (see page A26)

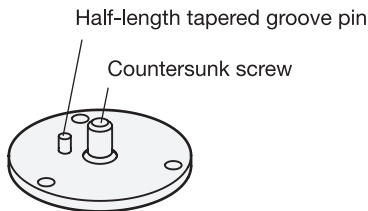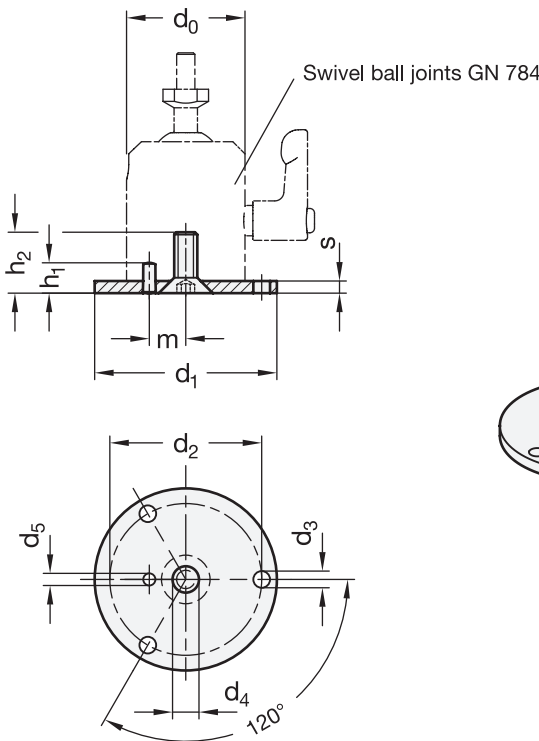

### GN 784.1

### STAINLESS STEEL

| Description    | d0 | d1 | d2   | d3  | d4 | d5 | h1 | h2   | m  | s   | ⚖   |
|----------------|----|----|------|-----|----|----|----|------|----|-----|-----|
| GN 784.1-42-MT | 23 | 42 | 32.5 | 4.5 | M5 | 2  | 6  | 8.5  | 7  | 2.5 | 29  |
| GN 784.1-49-MT | 31 | 49 | 40   | 4.5 | M6 | 3  | 6  | 10.5 | 9  | 3   | 46  |
| GN 784.1-60-MT | 39 | 60 | 50   | 5.5 | M8 | 4  | 10 | 14.6 | 12 | 4   | 91  |
| GN 784.1-70-MT | 49 | 70 | 60   | 5.5 | M8 | 4  | 10 | 14.6 | 16 | 4   | 122 |