

Levelling feet

Technopolymer base, SUPER-technopolymer stem

BASE

Glass-fibre reinforced polyamide based (PA) technopolymer, black colour, matte finish.

ARTICULATED STEM

Glass-fibre reinforced polyamide based (PA) SUPER-technopolymer, with hexagonal socket and regulation hexagon.

STANDARD EXECUTIONS

- **LS.A-STP**: without no-slip disk.
- **LS.A-AS-STP**: with NBR rubber no-slip disk, hardness 70 Shore A, supplied assembled to the base.

FEATURES

Thanks to the property of the SUPER-technopolymer stem, high rigidity and mechanical resistance are obtained in addition to natural resistance to corrosion.

The particular assembling system of the no-slip disk to the base assures a perfect anchoring, preventing separation even in case of impact during transport or of adhesion (sticking) to the floor (see No-slip disk).

ORDER INFORMATION

The levelling feet are supplied unassembled to make carriage and storage easier. The components (base and stem) are supplied in separate packing: less volume taken and better protection from scratches and dirt.

To order bases and stems separately, see:


- table of possible combinations Bases/Stems
- the codes of the Bases
- the codes of the Stems

ACCESSORIES ON REQUEST

NT.: AISI 304 stainless steel or zinc-plated steel nut.




ELESA Original design

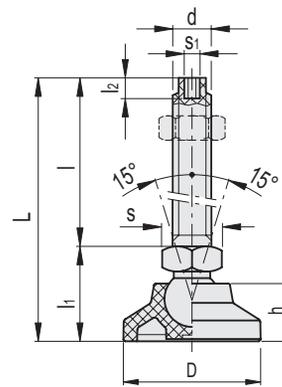

LS.A-STP

Code	Description	D	d	L	l	l ₁	l ₂	h	s	s ₁	Articulation Ø	Max. limit static load* [N]	
341123	LS.A-25-14-STP-M8x44	25	M8	68	44	24	5	12	16	3	14	2700	10
341127	LS.A-25-14-STP-M8x69	25	M8	93	69	24	5	12	16	3	14	2700	12
341223	LS.A-25-14-STP-M10x44	25	M10	68	44	24	6	12	16	4	14	4800	12
341227	LS.A-25-14-STP-M10x69	25	M10	93	69	24	6	12	16	4	14	5000	14
341233	LS.A-25-14-STP-M10x99	25	M10	123	99	24	6	12	16	4	14	5100	17
341323	LS.A-25-14-STP-M12x44	25	M12	68	44	24	7	12	16	5	14	6800	13
341327	LS.A-25-14-STP-M12x69	25	M12	93	69	24	7	12	16	5	14	7000	17
341333	LS.A-25-14-STP-M12x99	25	M12	123	99	24	7	12	16	5	14	7000	21
341523	LS.A-25-14-STP-M16x69	25	M16	96	69	27	7	12	22	6	14	7000	27
341527	LS.A-25-14-STP-M16x109	25	M16	136	109	27	7	12	22	6	14	7000	37
341543	LS.A-25-14-STP-M16x149	25	M16	176	149	27	7	12	22	6	14	7000	46
341563	LS.A-25-14-STP-M16x169	25	M16	196	169	27	7	12	22	6	14	6000	51
342123	LS.A-32-14-STP-M8x44	32	M8	69	44	25	5	15	16	3	14	2700	15
342127	LS.A-32-14-STP-M8x69	32	M8	94	69	25	5	15	16	3	14	2700	16
342223	LS.A-32-14-STP-M10x44	32	M10	69	44	25	6	15	16	4	14	4800	16
342227	LS.A-32-14-STP-M10x69	32	M10	94	69	25	6	15	16	4	14	5000	18
342233	LS.A-32-14-STP-M10x99	32	M10	124	99	25	6	15	16	4	14	5100	21
342323	LS.A-32-14-STP-M12x44	32	M12	69	44	25	7	15	16	5	14	6800	18
342327	LS.A-32-14-STP-M12x69	32	M12	94	69	25	7	15	16	5	14	7000	21
342333	LS.A-32-14-STP-M12x99	32	M12	124	99	25	7	15	16	5	14	7000	25
342523	LS.A-32-14-STP-M16x69	32	M16	97	69	28	7	15	22	6	14	8000	31
342527	LS.A-32-14-STP-M16x109	32	M16	137	109	28	7	15	22	6	14	8000	42
342543	LS.A-32-14-STP-M16x149	32	M16	177	149	28	7	15	22	6	14	7000	50
342563	LS.A-32-14-STP-M16x169	32	M16	197	169	28	7	15	22	6	14	6000	55

* The max static load is the value above which the load applied to the element may cause some plastic material breakage, in particular conditions of use. Obviously, a factor that takes into consideration the importance and the safety level of the specific application must be applied to this value.

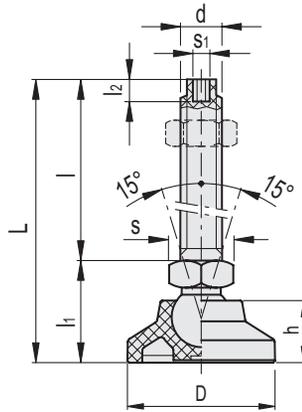


LS.A-STP

Code	Description	D	d	L	l	li	l2	h	s	s1	Articulation Ø	Max. limit static load* [N]	⚖️
343123	LS.A-40-14-STP-M8x44	40	M8	69.5	44	25.5	5	16.5	16	3	14	2700	20
343127	LS.A-40-14-STP-M8x69	40	M8	94.5	69	25.5	5	16.5	16	3	14	2700	21
343227	LS.A-40-14-STP-M10x44	40	M10	69.5	44	25.5	6	16.5	16	4	14	4800	21
343227	LS.A-40-14-STP-M10x69	40	M10	94.5	69	25.5	6	16.5	16	4	14	5000	24
343233	LS.A-40-14-STP-M10x99	40	M10	124.5	99	25.5	6	16.5	16	4	14	5100	27
343323	LS.A-40-14-STP-M12x44	40	M12	69.5	44	25.5	7	16.5	16	5	14	6800	23
343327	LS.A-40-14-STP-M12x69	40	M12	94.5	69	25.5	7	16.5	16	5	14	7000	26
343333	LS.A-40-14-STP-M12x99	40	M12	124.5	99	25.5	7	16.5	16	5	14	7000	31
343523	LS.A-40-14-STP-M16x69	40	M16	96.5	69	27.5	7	16.5	22	6	14	8000	36
343527	LS.A-40-14-STP-M16x109	40	M16	136.5	109	27.5	7	16.5	22	6	14	8000	47
343543	LS.A-40-14-STP-M16x149	40	M16	176.5	149	27.5	7	16.5	22	6	14	7000	55
343563	LS.A-40-14-STP-M16x169	40	M16	196.5	169	27.5	7	16.5	22	6	14	6000	60
344123	LS.A-50-14-STP-M8x44	50	M8	72	44	28	5	18	16	3	14	2700	26
344127	LS.A-50-14-STP-M8x69	50	M8	97	69	28	5	18	16	3	14	2700	27
344223	LS.A-50-14-STP-M10x44	50	M10	72	44	28	6	18	16	4	14	4800	27
344227	LS.A-50-14-STP-M10x69	50	M10	97	69	28	6	18	16	4	14	5000	29
344233	LS.A-50-14-STP-M10x99	50	M10	127	99	28	6	18	16	4	14	5100	32
344323	LS.A-50-14-STP-M12x44	50	M12	72	44	28	7	18	16	5	14	6800	29
344327	LS.A-50-14-STP-M12x69	50	M12	97	69	28	7	18	16	5	14	7000	32
344333	LS.A-50-14-STP-M12x99	50	M12	127	99	28	7	18	16	5	14	7000	36
344523	LS.A-50-14-STP-M16x69	50	M16	99	69	30	7	18	22	6	14	8000	42
344527	LS.A-50-14-STP-M16x109	50	M16	139	109	30	7	18	22	6	14	8000	53
344543	LS.A-50-14-STP-M16x149	50	M16	179	149	30	7	18	22	6	14	7000	61
344563	LS.A-50-14-STP-M16x169	50	M16	199	169	30	7	18	22	6	14	6000	66
344613	LS.A-60-14-STP-M8x44	60	M8	79	44	33	5	24	16	3	14	2700	39
344617	LS.A-60-14-STP-M8x69	60	M8	104	69	33	5	24	16	3	14	2700	40
344623	LS.A-60-14-STP-M10x44	60	M10	79	44	33	6	24	16	4	14	4800	40
344627	LS.A-60-14-STP-M10x69	60	M10	104	69	33	6	24	16	4	14	5000	43
344633	LS.A-60-14-STP-M10x99	60	M10	134	99	33	6	24	16	4	14	5100	43
344723	LS.A-60-14-STP-M12x44	60	M12	79	44	33	7	24	16	5	14	6800	43
344727	LS.A-60-14-STP-M12x69	60	M12	104	69	33	7	24	16	5	14	7000	45
344733	LS.A-60-14-STP-M12x99	60	M12	134	99	33	7	24	16	5	14	7000	49
345227	LS.A-60-14-STP-M16x69	60	M16	106	69	37	7	24	22	6	14	8000	55
345233	LS.A-60-14-STP-M16x109	60	M16	146	109	37	7	24	22	6	14	8000	66
345237	LS.A-60-14-STP-M16x149	60	M16	186	149	37	7	24	22	6	14	7000	74
345243	LS.A-60-14-STP-M16x169	60	M16	206	169	37	7	24	22	6	14	6000	79

* The max static load is the value above which the load applied to the element may cause some plastic material breakage, in particular conditions of use. Obviously, a factor that takes into consideration the importance and the safety level of the specific application must be applied to this value.




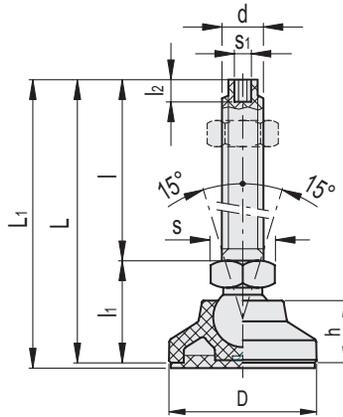

LS.A-AS-STP

Code	Description	D	d	L	L ₁	l	l ₁	l ₂	h	s	s ₁	Articulation ∅	Max. limit static load* [N]	⚖
346123	LS.A-25-14-AS-STP-M8x44	25	M8	68	71	44	24	5	12	16	3	14	2700	13
346127	LS.A-25-14-AS-STP-M8x69	25	M8	93	96	69	24	5	12	16	3	14	2700	14
346223	LS.A-25-14-AS-STP-M10x44	25	M10	68	71	44	24	6	12	16	4	14	4800	14
346227	LS.A-25-14-AS-STP-M10x69	25	M10	93	96	69	24	6	12	16	4	14	5000	17
346233	LS.A-25-14-AS-STP-M10x99	25	M10	123	126	99	24	6	12	16	4	14	5100	19
346323	LS.A-25-14-AS-STP-M12x44	25	M12	68	71	44	24	7	12	16	5	14	6800	16
346327	LS.A-25-14-AS-STP-M12x69	25	M12	93	96	69	24	7	12	16	5	14	7000	19
346333	LS.A-25-14-AS-STP-M12x99	25	M12	123	126	99	24	7	12	16	5	14	7000	23
346523	LS.A-25-14-AS-STP-M16x69	25	M16	96	99	69	27	7	12	22	6	14	7000	29
346527	LS.A-25-14-AS-STP-M16x109	25	M16	136	139	109	27	7	12	22	6	14	7000	40
346543	LS.A-25-14-AS-STP-M16x149	25	M16	176	179	149	27	7	12	22	6	14	7000	48
346563	LS.A-25-14-AS-STP-M16x169	25	M16	196	199	169	27	7	12	22	6	14	6000	53
347123	LS.A-32-14-AS-STP-M8x44	32	M8	69	72	44	25	5	15	16	3	14	2700	19
347127	LS.A-32-14-AS-STP-M8x69	32	M8	94	97	69	25	5	15	16	3	14	2700	21
347223	LS.A-32-14-AS-STP-M10x44	32	M10	69	72	44	25	6	15	16	4	14	4800	21
347227	LS.A-32-14-AS-STP-M10x69	32	M10	94	97	69	25	6	15	16	4	14	5000	23
347233	LS.A-32-14-AS-STP-M10x99	32	M10	124	127	99	25	6	15	16	4	14	5100	26
347323	LS.A-32-14-AS-STP-M12x44	32	M12	69	72	44	25	7	15	16	5	14	6800	22
347327	LS.A-32-14-AS-STP-M12x69	32	M12	94	97	69	25	7	15	16	5	14	7000	25
347333	LS.A-32-14-AS-STP-M12x99	32	M12	124	127	99	25	7	15	16	5	14	7000	30
347523	LS.A-32-14-AS-STP-M16x69	32	M16	97	100	69	28	7	15	22	6	14	8000	36
347527	LS.A-32-14-AS-STP-M16x109	32	M16	137	140	109	28	7	15	22	6	14	8000	46
347543	LS.A-32-14-AS-STP-M16x149	32	M16	177	180	149	28	7	15	22	6	14	7000	55
347563	LS.A-32-14-AS-STP-M16x169	32	M16	197	200	169	28	7	15	22	6	14	6000	59

* The max static load is the value above which the load applied to the element may cause some plastic material breakage, in particular conditions of use. Obviously, a factor that takes into consideration the importance and the safety level of the specific application must be applied to this value.

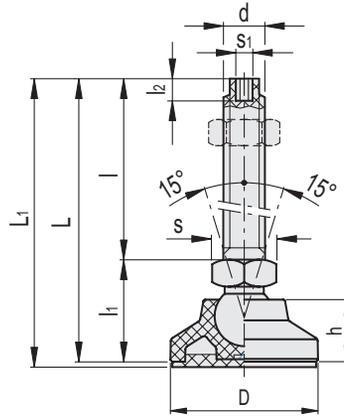

LS.A-AS-STP

Code	Description	D	d	L	Li	l	li	l2	h	s	s1	Articulation Ø	Max. limit static load* [N]	⚖️
348123	LS.A-40-14-AS-STP-M8x44	40	M8	69.5	72.5	44	25.5	5	16.5	16	3	14	2700	27
348127	LS.A-40-14-AS-STP-M8x69	40	M8	94.5	97.5	69	25.5	5	16.5	16	3	14	2700	28
348223	LS.A-40-14-AS-STP-M10x44	40	M10	69.5	72.5	44	25.5	6	16.5	16	4	14	4800	28
348227	LS.A-40-14-AS-STP-M10x69	40	M10	94.5	97.5	69	25.5	6	16.5	16	4	14	5000	31
348233	LS.A-40-14-AS-STP-M10x99	40	M10	124.5	127.5	99	25.5	6	16.5	16	4	14	5100	34
348323	LS.A-40-14-AS-STP-M12x44	40	M12	69.5	72.5	44	25.5	7	16.5	16	5	14	6800	30
348327	LS.A-40-14-AS-STP-M12x69	40	M12	94.5	97.5	69	25.5	7	16.5	16	5	14	7000	33
348333	LS.A-40-14-AS-STP-M12x99	40	M12	124.5	127.5	99	25.5	7	16.5	16	5	14	7000	38
348523	LS.A-40-14-AS-STP-M16x69	40	M16	96.5	99.5	69	27.5	7	16.5	22	6	14	8000	44
348527	LS.A-40-14-AS-STP-M16x109	40	M16	136.5	139.5	109	27.5	7	16.5	22	6	14	8000	54
348543	LS.A-40-14-AS-STP-M16x149	40	M16	176.5	179.5	149	27.5	7	16.5	22	6	14	7000	62
348563	LS.A-40-14-AS-STP-M16x169	40	M16	196.5	199.5	169	27.5	7	16.5	22	6	14	6000	67
349123	LS.A-50-14-AS-STP-M8x44	50	M8	72	75	44	28	5	18	16	3	14	2700	31
349127	LS.A-50-14-AS-STP-M8x69	50	M8	97	100	69	28	5	18	16	3	14	2700	32
349223	LS.A-50-14-AS-STP-M10x44	50	M10	72	75	44	28	6	18	16	4	14	4800	32
349227	LS.A-50-14-AS-STP-M10x69	50	M10	97	100	69	28	6	18	16	4	14	5000	34
349233	LS.A-50-14-AS-STP-M10x99	50	M10	127	130	99	28	6	18	16	4	14	5100	37
349323	LS.A-50-14-AS-STP-M12x44	50	M12	72	75	44	28	7	18	16	5	14	6800	34
349327	LS.A-50-14-AS-STP-M12x69	50	M12	97	100	69	28	7	18	16	5	14	7000	37
349333	LS.A-50-14-AS-STP-M12x99	50	M12	127	130	99	28	7	18	16	5	14	7000	41
349523	LS.A-50-14-AS-STP-M16x69	50	M16	99	102	69	30	7	18	22	6	14	8000	47
349527	LS.A-50-14-AS-STP-M16x109	50	M16	139	142	109	30	7	18	22	6	14	8000	57
349543	LS.A-50-14-AS-STP-M16x149	50	M16	179	182	149	30	7	18	22	6	14	7000	66
349563	LS.A-50-14-AS-STP-M16x169	50	M16	199	202	169	30	7	18	22	6	14	6000	71
349613	LS.A-60-14-AS-STP-M8x44	60	M8	79	82	44	35	5	24	16	3	14	2700	60
349617	LS.A-60-14-AS-STP-M8x69	60	M8	104	107	69	35	5	24	16	3	14	2700	62
349623	LS.A-60-14-AS-STP-M10x44	60	M10	79	82	44	35	6	24	16	4	14	4800	62
349627	LS.A-60-14-AS-STP-M10x69	60	M10	104	107	69	35	6	24	16	4	14	5000	64
349633	LS.A-60-14-AS-STP-M10x99	60	M10	134	137	99	35	6	24	16	4	14	5100	67
349723	LS.A-60-14-AS-STP-M12x44	60	M12	79	82	44	35	7	24	16	5	14	6800	63
349727	LS.A-60-14-AS-STP-M12x69	60	M12	104	107	69	35	7	24	16	5	14	7000	67
349733	LS.A-60-14-AS-STP-M12x99	60	M12	134	137	99	35	7	24	16	5	14	7000	71
350227	LS.A-60-14-AS-STP-M16x69	60	M16	106	109	69	37	7	24	22	6	14	8000	77
350233	LS.A-60-14-AS-STP-M16x109	60	M16	146	149	109	37	7	24	22	6	14	8000	87
350323	LS.A-60-14-AS-STP-M16x149	60	M16	186	189	149	37	7	24	22	6	14	7000	96
350327	LS.A-60-14-AS-STP-M16x169	60	M16	206	209	169	37	7	24	22	6	14	6000	100

* The max static load is the value above which the load applied to the element may cause some plastic material breakage, in particular conditions of use. Obviously, a factor that takes into consideration the importance and the safety level of the specific application must be applied to this value.

