

Lobe knobs

Technopolymer certified self-extinguish

MATERIAL

Glass-fibre reinforced polyamide based (PA) technopolymer certified self-extinguishing UL-94 V0.

STANDARD EXECUTION

Brass boss with threaded blind hole (VCT.25) or pass-through hole (VCT. from 32 to 50).


TECHNICAL DATA

In long-term thermal ageing tests, with a maximum decrease in critical mechanical properties by 50%, the relative temperature index UL 746 B (RTI) was equal to 65.

The "V0" certification in accordance with UL-94 V (Underwriters Laboratories) (see page A5) indicates that on a plastic test sample with specific shape and dimensions, in the vertical position, the flame is extinguished within 10 seconds, without generating incandescent drops.



ELESA Original design

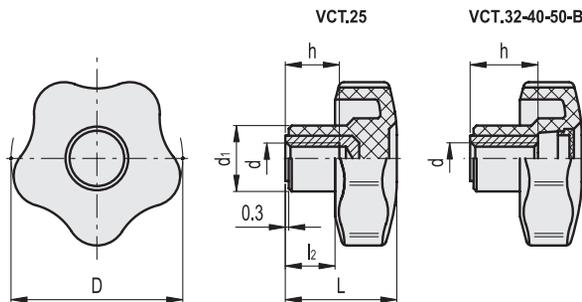

Code	Description	D	d6H	L	d1	l2	h	⚖
150534	VCT.25 AE-VO B-M5	25	M5	19	13	8	10	6
150544	VCT.32 AE-VO B-M6	32	M6	23	15	10	12	11
150564	VCT.40 AE-VO B-M8	40	M8	27	17	12	18	24
150584	VCT.50 AE-VO B-M10	50	M10	32	19	14	26	34

