



GN 666.5 / GN 666.7 Tubular Handles

Mounting sketch

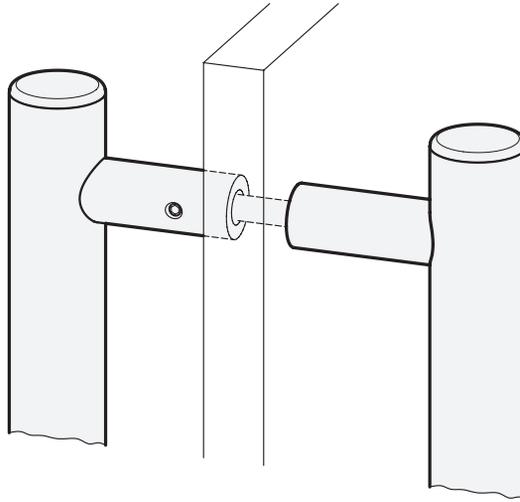

Example of application

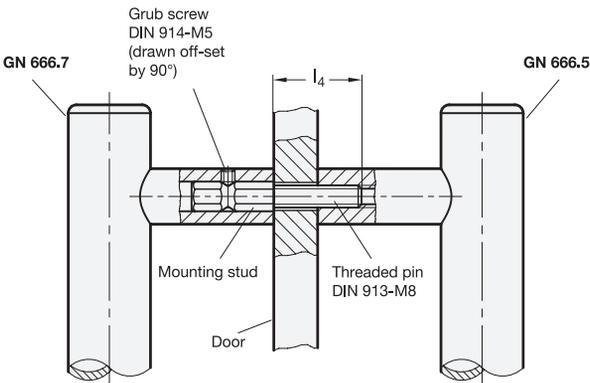

Tubular handles GN 666.5 / GN 666.7 allow the mounting of a pair of handles in opposite position. This method could be used on doors (double handle).

Generally a modification of the thread length l_4 is required for this. The included threaded pin DIN 913-M8x25-A2 of the mounting stud needs to be replaced by longer threaded pin, too. Handles with a modified thread length l_4 are available on request.