

Star Knobs

Stainless Steel, Hygienic Design

SPECIFICATION

Star knob

- Stainless steel AISI 316L
- Matte finish ($R_a < 0.8 \mu\text{m}$) **MT**
- Polished finish ($R_a < 0.8 \mu\text{m}$) **PL**

Sealing ring

- HNBR H**
 - Operating temperature $-25 \text{ }^\circ\text{C}$ to $+150 \text{ }^\circ\text{C}$
- EPDM E**
 - Operating temperature $-40 \text{ }^\circ\text{C}$ to $+120 \text{ }^\circ\text{C}$
- FKM F**
 - Operating temperature $-5 \text{ }^\circ\text{C}$ to $+200 \text{ }^\circ\text{C}$
- FDA compliant material
- Blue
- Hardness 85 ± 5 Shore A



INFORMATION


Star knobs GN 5435 are intended for use in hygienic areas. The sealed mounting surface enables fastening without dead spaces. The high quality finish and the large corner radii prevent adherence of dirt and facilitate cleaning.

ACCESSORY

- GN 7600 Sealing Rings (see page)

TECHNICAL INFORMATION

- Plastic Characteristics (see page A2)
- Stainless Steel Characteristics (see page A26)

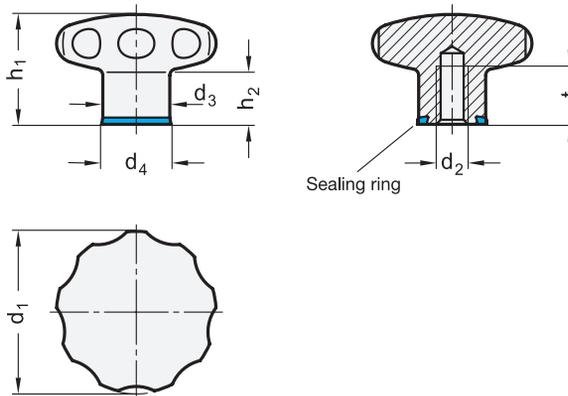

* Complete with

H E F

GN 5435-MT

STAINLESS STEEL

Description	d ₁	d ₂	d ₃	d ₄	h ₁	h ₂	t min.	⚖
GN 5435-40-M6-MT-*	40	M 6	18	18.8	30.5	15	12	136
GN 5435-40-M8-MT-*	40	M 8	18	18.8	30.5	15	15	133
GN 5435-50-M8-MT-*	50	M 8	21	21.8	34	17	15	277
GN 5435-50-M10-MT-*	50	M 10	21	21.8	34	17	18	222

GN 5435-PL

STAINLESS STEEL

Description	d ₁	d ₂	d ₃	d ₄	h ₁	h ₂	t min.	⚖
GN 5435-40-M6-PL-*	40	M 6	18	18.8	30.5	15	12	136
GN 5435-40-M8-PL-*	40	M 8	18	18.8	30.5	15	15	133
GN 5435-50-M8-PL-*	50	M 8	21	21.8	34	17	15	277
GN 5435-50-M10-PL-*	50	M 10	21	21.8	34	17	18	222

Weight Material H