

Pull-Down Plates

for Wedge Clamps GN 920.1, Steel

SPECIFICATION

Plate

Steel
Blackened

Socket cap screw ISO 4762

Steel

Distance sleeve

Steel




INFORMATION

Pull-down plates GN 920.2 allow wedge clamps GN 920.1 to clamp easily with pull-down effect. (see page 1070) to clamp easily with pull-down effect.

The socket cap screw ISO 4762 and the distance sleeve are included.

Security Information

The information in the operating instruction must be observed during installation, initial operation, and use. It is enclosed with the product and is provided digitally on the product page at elsa-ganter.com.

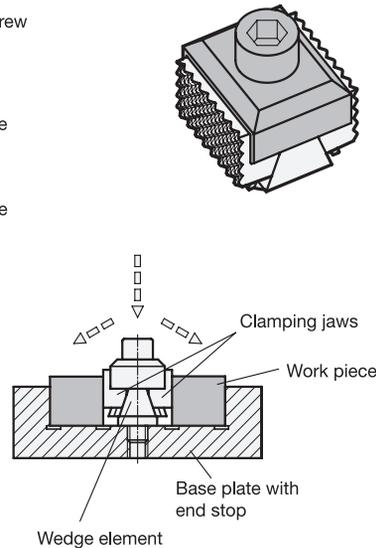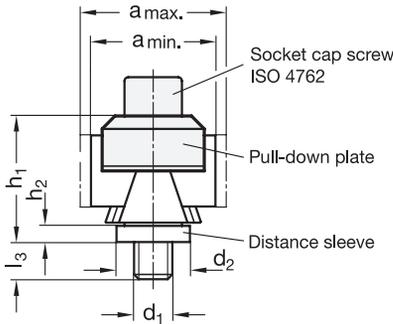

GN 920.2

Description	l ₁	l ₂	d ₁	a		a		b	d ₂ Ø	h ₁ ≈	h ₂	l ₃ max.	for wedge for wedge		⚖
				Type GA Type GL max.	Type GA Type GL min.	Type RF max.	Type RF min.						clamps GN 920.1 d	clamps GN 920.1 b	
GN 920.2-25-32-M8	25	32	M 8	44.5	39.5	39.5	34.5	21	18	27.5	4	7.5	M 8	21	60
GN 920.2-29-32-M8	29	32	M 8	44.5	39.5	39.5	34.5	25	18	27.5	4	7.5	M 8	25	76
GN 920.2-36-32-M8	36	32	M 8	44.5	39.5	39.5	34.5	32	18	27.5	4	7.5	M 8	32	84
GN 920.2-44-32-M8	44	32	M 8	44.5	39.5	39.5	34.5	40	18	27.5	4	7.5	M 8	40	92
GN 920.2-44-32-M12	44	32	M 12	45.5	40	45.5	40	40	23	38	5	11.5	M 12	40	156
GN 920.2-54-32-M8	54	32	M 8	44.5	39.5	39.5	34.5	50	18	27.5	4	7.5	M 8	50	90
GN 920.2-54-32-M12	54	32	M 12	45.5	40	45.5	40	50	23	38	5	11.5	M 12	50	170